



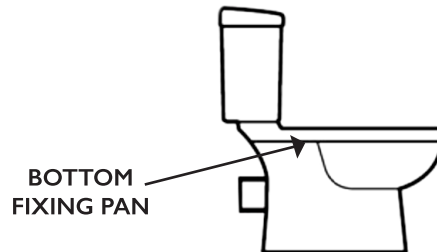


BOTTOM FIXING INSTRUCTIONS

Thank you for purchasing a Family Seat. Please check that you have all of the fixing components (as shown below) before fitting. Please select which type of pan you have using diagram below. See reverse for alternative option.

STANDARD COMPONENTS



BOTTOM FIX COMPONENTS



Carefully remove the Family Seat and all the fitting components from its packaging. For your convenience disposable gloves have been supplied for the removal of the old seat and fitting your new Family Seat. Select appropriate components for either Bottom or Top Fixing.

Method A – Bottom Fixing

Using disposable gloves provided remove the old toilet seat.

Select fitting components A, B, C, D, E, F, G & H as ringed above..

Select the black plastic hinge base (B) and clear rubber washer (C), then put the clear rubber washer (C) onto the black hinge base (B) and then place the hinge base on the hinge fixing hole (see fig 1)


Select the long screws (D) and insert the screws within the hinge base (see fig 2).

Select rubber wrapped stainless steel washer (G) and place it onto the long screw, ensure the metal part of the washer is facing downwards (Fig.3)

Select the wing nut (H) and place it onto the long screw. (see fig 4)



Adjust the hinge base position, by rotating it and moving it backwards and forwards in the slot to ensure the seat lines up with the pan. Once you are satisfied that the seat is sitting on the pan in the correct position, carefully remove the seat from the hinge base and fully tighten the screw. Place the shiny stainless steel hinge cover (A) over the hinge base (see fig 6).

Place the seat back onto the hinge base and insert the grub screws (E) onto the hinge body and then tighten the grub screws with the small Allen key provided (see fig 7).

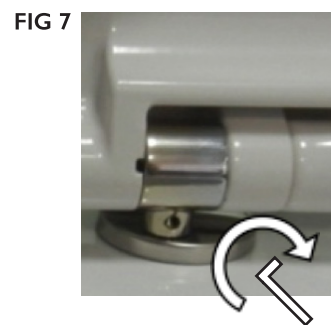

Cleaning Instructions



Do not use abrasive cleaning products or products containing chlorine or acids, as these may cause yellowing or peeling of the material. Use ONLY a mild detergent/non-abrasive household cleaner or neutral soap or natural household cleaning products which are best for effective, problem-free cleaning. **Do not use bleach or any products containing bleach on the seat.** Do not mix cleaning products as this can cause a reaction. After cleaning, ensure the chrome hinge is dried. Leave the seat and lid up whenever strong cleaning products (such as bleach) are left in the pan bowl to prevent damage to the seat from the vapours.




TOP FIXING INSTRUCTIONS

Thank you for purchasing a Family Seat. Please check that you have all of the fixing components (as shown below) before fitting. Please select which type of pan you have using diagram below. See reverse for alternative option.

STANDARD COMPONENTS

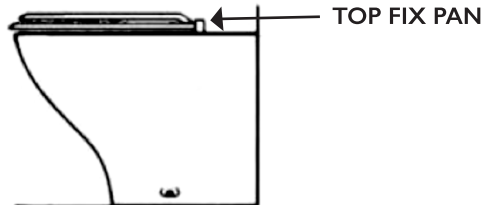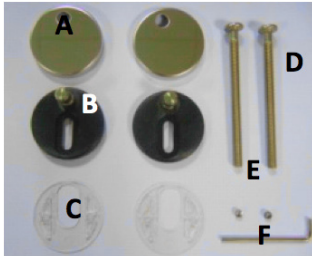

TOP FIX COMPONENTS

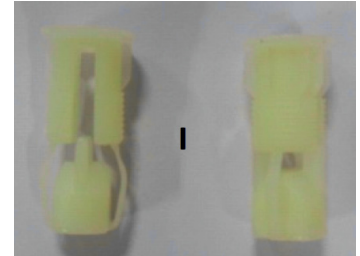

Carefully remove the Family Seat and all the fitting components from its packaging. For your convenience disposable gloves have been supplied for the removal of the old seat and fitting your new Family Seat. Select appropriate components for either Bottom or Top Fixing.

Method A – Top Fixing

Using disposable gloves provided remove the old toilet seat.

Select fitting components A, B, C, D, E, F & I as ringed above..

Select the nylon expansion nut (I) and place it into the hinge fixing hole on the pan (see fig 1)

Select the black plastic hinge base (B) and clear rubber washer (C), then put the clear rubber washer (C) on to the base of the black hinge base (B) and then place the hinge base on the hinge fixing hole (see fig 2)

Select the long screw (D) and insert the screws through the hinge base, tighten the screws until they are loosely secured to allow for adjustment of the seat on the pan (see fig 3).

Adjust the hinge base position, by rotating it and moving it backwards and forward in the slots to ensure the seat lines up with the pan. Once you are satisfied that the seat is sitting on the pan in the correct position, carefully remove the seat from the hinge base and fully tighten the screws (see fig 4).

Place the shiny stainless steel hinge cover (A) over the hinge base (see fig 5).

Place the seat back on to the hinge base and insert the grub screws (E) on to the hinge body and then tighten the grub screws with the small Allen key provided (see fig 6).

FIG 1




FIG 2



FIG 3




FIG 4



FIG 5



FIG 6



Cleaning Instructions

Do not use abrasive cleaning products or products containing chlorine or acids, as these may cause yellowing or peeling of the material. Use ONLY a mild detergent/non-abrasive household cleaner or neutral soap or natural household cleaning products which are best for effective, problem-free cleaning. **Do not use bleach or any products containing bleach on the seat.** Do not mix cleaning products as this can cause a reaction. After cleaning, ensure the chrome hinge is dried. Leave the seat and lid up whenever strong cleaning products (such as bleach) are left in the pan bowl to prevent damage to the seat from the vapours.