



CENTRE FOR TESTING AND CERTIFICATION - MECH-TEST

Mechanical Laboratory

05-077 Warszawa-Wesoła, ul. Klonowa 22
tel.: +48 603 23-26-45, e-mail: cbc.mech.test@gmail.com, www.cbc.org.pl

Date 4.03.2016

TEST REPORT NO. **CBC-027/2016**

Page 1 of 4

Subject of testing:	<i>Walking aids with built-in handgrips and three or more legs of which two or more are having wheels, which provide support whilst walking</i>	Classification according to PN-EN ISO 9999:2011 : 12 06 06
Type / Model:	<i>Gepard Rollator</i>	SN: 0312
Manufacturer:	<i>MOBILEX A/S Grønlandsvej 5 DK – 8660 Skanderborg</i>	Number of specimens: 1
Applicant:	<i>A-Net s.c. 93-469 Łódź, ul. Łaskowice174</i>	
Kind of testing	<i>Mechanical testing for conformity with PN-EN ISO 11199-2 : 2005</i>	
Test started:	29.02.2016	
Test finished:	4.03.2016	

Approved by:

DYREKTOR

mgr inż. Andrzej Tkaczyk

Special comments / enclosures:

Copyright © 2012 by Centre for Testing and Certification (applicable to report form)

Test results refer only to tested units.

Test results reported here are not applicable to the further modifications of the product affecting its structure, material or technology.


This test report shall be neither copied differently as in the whole nor be published without written consent of the Laboratory.



CHARACTERISTIC OF PRODUCT

Name : Gepard Rollator	Dimension of rollator: --
SN: 0312	Product code: --
Maximum permissible user mass: 150 kg	Mass of rollator: 6,71 kg

Description		Comments	
Elements/parameters/materials/dimensions			
Dimensions of walking rollator (fig. 2 PN-EN ISO 11199-2)	Distance between handgrips (dimension 2)	470 mm	
	Angle between of handgrip axis and direction of movement (α)	0°	
	Height of rollator (dimension 6)	745 mm	min.
		1017 mm	max.
	Width of rollator (dimension 5)	603 mm	
	Turning width (dimension 1)	845 mm	
Length of rollator (dimension 4)	680mm		
Dimensions of folded rollator (mm)		795 x 660 x 235	
Fig. 3	Handgrip - diameter	32 mm	Anatomical handgrip
	Handgrip - length	100 mm	
Wheels of rollator	Front wheels- quantity	2	castor wheels
	Front wheels - diameter	202 mm	
	Front wheels - width	35 mm	
	Front wheels - brake	none	
	Rear wheels - quantity	2	
	Rear wheels - diameter	202mm	
	Rear wheels - width	35 mm	
Rear wheels - brake	Included		
Tip	Diameter		
	Material	Not any	
	Colour		
Material of rollator (fig. 1)	Front legs	Aluminum,	
	Bracing member (no. 8)	Steel,	
	Rear legs	Hard plastic,	
	Height adjusting device (no. 4)	Bolts, nuts	
	Handgrip (no 5), Brake elements	Hard plastic	

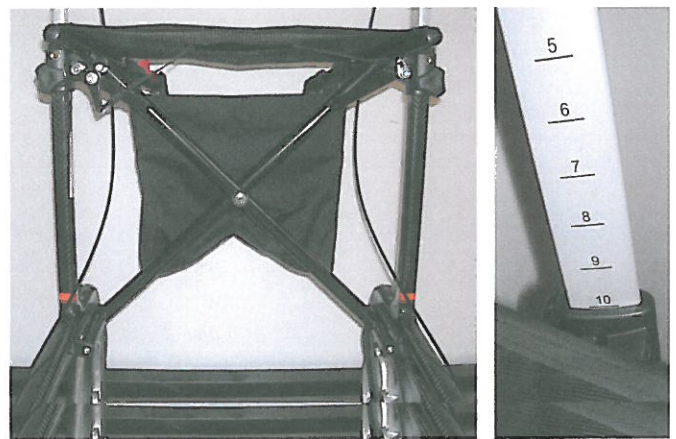

MOBILEX Gepard rollator
For outdoor and indoor use

MOBILEX A/S Grønlandsvej 5 DK - 8660 Skanderborg Tel: +45 87 93 22 20 www.mobilex.dk	Max. 150kg Max. width = 60.8cm Max. load in basket = 5 kg	
--	---	--

CE Produced 2015 09 Serial no. 0312

RESULT OF TESTS ACCORDING TO PN-EN ISO 11199-2:2005

Requirements according to clause	Test method according to clause	Checked characteristics/assemblies/parameters	Real value	Test result	Comments	
4.1	Measur.	Manoeuvrability	\varnothing 202 mm width 30mm Conf.	Pos.	\varnothing front wheels ≥ 75 mm <u>outdoor intended rollator:</u> \varnothing front wheels ≥ 180 mm width of wheels ≥ 28 mm	
4.2	5.3	Forward-direction stability	17,5 ⁰ Conf.	Pos.	Stability required $\geq 10^\circ$	
4.2	5.4	Backward-direction stability	10,0 ⁰ Conf.	Pos.	Stability required $\geq 7^\circ$	
4.2	5.5	Sideway-direction stability	3,6 ⁰ Conf.	Pos.	Stability required $\geq 3,5^\circ$	
4.2	5.6	Stability – with loaded basket, bag, drip, oxygen cylinder (max. load bags – 5 kg)	forwards	16 ⁰ Conf.	Pos.	Stability required $\geq 10^\circ$
			backwards	12,5 ⁰ Conf.	Pos.	Stability required $\geq 7^\circ$
			side	4,7 ⁰ Conf.	Pos.	Stability required $\geq 3,5^\circ$
4.3	V/I	Brakes	Servicing facility during rollator motion with more than 2 wheels	Conf.	Pos.	
	V/I		Parking brakes in rollator with more than 2 wheels and resting seat or intended for outdoor use	Conf.	Pos.	
	5.7.1.1		Brake grip distance (fig. 4, dimension 1)	65 mm Conf.	Pos.	≤ 75 mm
	5.7.1		Running brake effectiveness	Conf.	Pos.	Movement of rollator ≤ 10 mm in 1 minute
	Measur.		Force to set parking brake	32N Conf.	Pos.	≤ 60 N
	Measur.		Force to release parking brake	22N Conf.	Pos.	≤ 40 N
	5.7.2		Parking brake effectiveness	Conf.	Pos.	Movement of rollator ≤ 10 mm in 1 minute
	V/I		Possibility to compensate brake wear	Conf.	Pos.	
V/I	Brake not adversely affected by folding, unfolding or adjusting actions of rollator	Conf.	Pos.			
4.4	Measur. V/I	Handgrip	32 mm Conf.	Pos.	Width of handgrip ≥ 20 mm and ≤ 50 mm	
4.5	Measur. V/I	Leg section and tip	--	N/A	\varnothing tip ≥ 35 mm (tested rollator is equipped in four wheels)	
4.6	5.10	Resting seat – static loading durability	Conf.	Pos.	1 minute under load 1,2 x user's weight $\pm 2\%$ (180 kg)	
4.7	5.12	Mechanical durability	Fatigue test	Conf.	Pos.	200 000 cycles with load. 120 kg $\pm 2\%$, f=1Hz
4.7	5.11		Static loading test	Conf.	Pos.	loading 180 kg $\pm 2\%$, 5sek. NOTE 1
4.8	V/I	Adjusting devices	Conf.	Pos.		
4.9	5.14	Folding mechanism	Conf.	Pos.		
4.11	ISO 10993-1	Material s and finish	Biocompatibility of material with human body	--	N/T	
	V/I		Free of discolouring of skin or clothing in contact with rollator materials	Conf.	Pos.	
	V/I		Burrs, shar edges, projections	Conf.	Pos.	
Marking and labelling of product						
6.2	V/I	a) Maximum user mass	Included	Pos.		
		b) Maximum safe working load (SWL) to be marked on accessories	Included	Pos.		
		c) Maximum allowed angle between the longitudinal centreline of the handle and the direction of motion, if the handles are sideways adjustable	--	N/A	angle between direction of motion and longitudinal axis of handgrip not adjustable	
		d) Manufacturer's name or trade name and address	Included	Pos.		
		e) Manufacturer's model identification name and/or number	Included	Pos.		
		f) Month and year of manufacture	Included	Pos.		
		g) Maximum extension of the height adjustment, marked on the adjusting members	Included	Pos.		
		h) Maximum width of the rollator	Included	Pos.		
		i) Rollator intended for outdoor/indoor use	Included	Pos.		
4.10	V/I	Warning showing allowed angle between handle axis and direction of movement or physical stop of angle adjusting	--	N/A	angle between direction of motion and longitudinal axis of handgrip not adjustable	

Contents of user manual and/or assembly manual or clear and indelible marking of product

6.3	V/I	a) Maximum rollator height	Included	Pos.	
		b) Minimum rollator height	Included	Pos.	
		c) maintenance and cleaning instructions, including a description of the method and suitable cleaning agents and any precautions needed to avoid corrosion and/or ageing of the materials used in construction of the rollator	Included	Pos.	
		d) Instructions for assembly, adjustment of all kinds, folding and unfolding	Included	Pos.	
		e) Warnings and advice about precautions relating to safe distances between moving and stationary parts (see EN 12182, Clauses 12 and 13, for guidance)	Included	Pos.	
		f) Maximum safe working load (SWL) for load carrying accessories such as basket, tray, shopping bag, etc.	Included	Pos.	
4.10	V/I	Warning in user manual on consequences of such an adjustment of angle between handle longitudinal axis and direction of movement outside allowed value (when handles are adjustable aside).	--	N/A	angle between direction of motion and longitudinal axis of handgrip not adjustable

TEST CONDITIONS

Ambient temperature	22°C	Required temperature 21°C ±5°C
Relative humidity of air:	50 %	Not required
Comments:		
All tests performed with maximum height adjustment of rollator.		
All tests performed in the least stable position of self-adjusting wheels.		
Tests performed with handles positioned at their maximum (allowed) angle to the direction of motion (when adjustment is possible).		
Sequence of tests: stability test, static loading test, fatigue test.		
One rollator was tested.		
During visual inspection before testing any visible defects that could have influence on test results were not stated.		

Pos. – positive; Neg – negative; N/T – not tested; N/A – not applicable; N/R – not required, N/O – not occurred, V/I.- visual inspection, Conf.- conformed.

NOTE 1: Deformation – 50mm, elastic deformation - 49mm, permanent deformation - 1mm

CONCLUSIONS:

Testing object **conforms** with requirements of PN-EN ISO 11199-2 : 2005, in scope of mechanical testing ordered by client, excluding biocompatibility tests of material with human body according to PN-EN ISO 10993-1:2010

---- END ----