

Dongguan Anci Electronic Technology Co., Ltd.

Add.: 1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China. Tel: 86 -769 -8507 5888 Fax: 86 -769 -8507 5898 Web: www.anci.com

CERTIFICATE OF CONFORMITY

Certificate No.: 20AE06453E 002

This Cerification of Compliance is hereby issued to the product designated below

Report No.

EA2006453E 02001

Applicant

: Ledlenser Corporation Ltd.

Address

No.25, Yudong 1 Road, Dongcheng Town, Yangdong District,

Yangjiang City, GD, 529931, China

Manufacturer

Ledlenser Corporation Ltd.

Address

No.25, Yudong 1 Road, Dongcheng Town, Yangdong District,

Yangjiang City, GD, 529931, China

Description of Product:

Flashlight

Model No.

P17R Core

Ratings

100-240V~, 50/60Hz, 1.0A Max.[For adapter Input]

19Vdc, 2.1A. [For adapter Output]

6.4V, 36.48Wh, 5700mAh[For luminaires]

Test Standards

EN IEC 55015:2019

EN 61547:2009

EN 61000-3-2:2014

EN 61000-3-3:2013+A1:2019

This certificate of conformity is based on evaluation of a sample of the above mentioned product. Technical report and documentation are at the license Holder's disposal. This is to certify that the tested sample is in conformity with the Council Directive 2014/30/EU, referred to as the EMC. It is possible to use CE marking to demonstrate the conformity with this EMC Directive.

Test Laboratory

((

Alan He I C Director
Date of Issue: July 7, 2020

This certificate of conformity is based on a single evaluation of the submitted sample of the above mentioned product. It does not imply an assessment of the whole production and other relevant Directives have to be observed.



EMC TEST REPORT



For Electromagnetic Interference of

Report Reference No.....: EA2006453E 02001

Engineer (name + signature): Wite Chen

Reviewed by (name + signature): Tiger Xu

Approved by (name + signature): Alan He

Date of Receipt of EUT...... June 22, 2020

Date of Test...... June 22, 2020 to July 6, 2020

Date of issue: July 7, 2020

Testing Laboratory: Dong Guan Anci Electronic Technology Co., Ltd

Address....... 1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan

Lake Hi-tech Industrial Development Zone, Dongguan City,

Guangdong Pr., China.

Laboratory location: EMC Laboratory

Applicant's name.....: Ledlenser Corporation Ltd.

Address: No.25, Yudong 1 Road, Dongcheng Town, Yangdong District,

Yangjiang City, GD, 529931, China

Manufacturer.....: Ledlenser Corporation Ltd.

Address: No.25, Yudong 1 Road, Dongcheng Town, Yangdong District,

Yangjiang City, GD, 529931, China

First Factory's name...... Ledlenser Corporation Ltd.

Yangjiang City, GD, 529931, China



ANCI

Rev. 3.1

Test specification:

EUT description: Flashlight

Trade Mark.....

Model/Type reference P17R Core

Test Sample...... P17R Core

19Vdc, 2.1A. [For adapter Output]

6.4V, 36.48Wh, 5700mAh[For luminaires]

Tested Voltage...... I/P: 230Vac, 50Hz

Standards. EN IEC 55015:2019

EN 61547:2009

EN 61000-3-2:2014

EN 61000-3-3:2013+A1:2019

The device described above was tested by Dong Guan Anci Electronic Technology Co., Ltd. to determine the maximum emission levels emanated from the device and severity levels of the device endure and its performance criterion. The measurement results are contained in this test report and Dong Guan Anci Electronic Technology Co., Ltd. assumes full responsibility for the accuracy and completeness of these measurements. This report shows the EUT is technically compliance with the above official standards.

This report applies to the above sample only and shall not be reproduced in part without written approval of Dong Guan Anci Electronic Technology Co., Ltd.



Report No.: EA2006432E 02001 3 of 73



| Table of Contents | Page |
|--|----------|
| 1 . GENERAL INFORMATION | 6 |
| 1.1 PRODUCT INFORMATION | 6 |
| 1.2 Details about the Test Laboratory | 7 |
| 2. SUMMARY OF TEST RESULTS | 9 |
| 2.1 MEASUREMENT UNCERTAINTY | 10 |
| 2.2 DESCRIPTION OF TEST MODES | 10 |
| 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 11 |
| 3 . EMISSION TEST | 12 |
| 3.1 Conducted Disturbance at Mains Terminals | 12 |
| 3.1.1 LIMIT OF CONDUCTED EMISSION(MAINS PORT) | 12 |
| 3.1.2 MEASUREMENT INSTRUMENTS LIST | 12 |
| 3.1.3 TEST PROCEDURE | 13 |
| 3.1.4 DEVIATION FROM TEST STANDARD | 13 |
| 3.1.5 TEST SETUP 3.1.6 EUT OPERATING CONDITIONS | 13 13 |
| 3.1.7 TEST RESULTS | 13 |
| 3.2.1 Specification Limits | 17 |
| 3.2.2 MEASUREMENT INSTRUMENTS LIST | 17 |
| 3.2.3 TEST PROCEDURE | 17 |
| 3.2.4 TEST SETUP | 18 |
| 3.2.5 EUT OPERATING CONDITIONS | 18 |
| 3.2.6 TEST RESULTS | 18 |
| 3.3 Radiated Disturbance (30MHz to 1000MHz) | 19 |
| 3.3.1 LIMITS OF RADIATED EMISSION MEASUREMENT | 19 |
| 3.3.2 MEASUREMENT INSTRUMENTS LIST | 19 |
| 3.3.3 TEST PROCEDURE 3.3.4 DEVIATION FROM TEST STANDARD | 20 20 |
| 3.3.5 TEST SETUP | 20 |
| 3.3.6 EUT OPERATING CONDITIONS | 21 |
| 3.3.7 TEST RESULTS | 22 |
| 3.4.1 MEASUREMENT INSTRUMENTS LIST | 27 |
| 3.4.2 LIMITS OF MAGNETIC EMISSION MEASUREMENT | 27 |
| 3.4.3 LARGE LOOP ANTENNA SETUP DIAGRAM | 28 |
| 3.4.4 OPERATING CONDITIONS OF THE EUT | 29 |
| 3.4.5 MAGNETIC EMISSION DATA | 29 |
| 3.4.6 TEST RESULTS | 30 |
| 3.5.1 LIMITS OF HARMONICS CURRENT MEASUREMENT 3.5.2 MEASUREMENT INSTRUMENTS LIST | 37 38 |
| 3.5.2 MEASUREMENT INSTRUMENTS LIST 3.5.3 TEST PROCEDURE | 38 38 |
| 3.5.4 DEVIATION FROM TEST STANDARD | 38 |
| | |





| Table of Contents | Page |
|---|--|
| 3.5.5 TEST SETUP 3.5.6 EUT OPERATING CONDITIONS 3.6 VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT 3.6.1 LIMITS OF VOLTAGE FLUCTUATION AND FLICKSMEASUREMENT 3.6.2 MEASUREMENT INSTRUMENTS LIST 3.6.3 TEST PROCEDURE 3.6.4 DEVIATION FROM TEST STANDARD 3.6.5 TEST SETUP | 38 38 40 40 40 40 40 41 |
| 4 . EMC IMMUNITY TEST | 42 |
| 4.1 STANDARD COMPLIANCE/SERVRITY LEVEL/CRITERIA | 42 |
| 4.2 GENERAL PERFORMANCE CRITERIA | 43 |
| 4.3 GENERAL PERFORMANCE CRITERIA TEST SETUP | 43 |
| 4.4 ESD TESTING | 44 |
| 4.4.1 TEST SPECIFICATION | 44 |
| 4.4.2 MEASUREMENT INSTRUMENTS | 44 |
| 4.4.3 TEST PROCEDURE 4.4.4 DEVIATION FROM TEST STANDARD | 44 44 |
| 4.4.5 TEST SETUP | 4 4 45 |
| 4.4.6 TEST RESULTS | 46 |
| 4.5 RS TESTING | 47 |
| 4.5.1 TEST SPECIFICATION | 47 |
| 4.5.2 MEASUREMENT INSTRUMENTS | 47 |
| 4.5.3 TEST PROCEDURE 4.5.4 DEVIATION FROM TEST STANDARD | 47 47 |
| 4.5.5 TEST SETUP | 48 |
| 4.5.6 TEST RESULTS | 49 |
| 4.6 EFT/BURST TESTING | 50 |
| 4.6.1 TEST SPECIFICATION | 50 |
| 4.6.2 MEASUREMENT INSTRUMENTS | 50 |
| 4.6.3 TEST PROCEDURE | 50 50 |
| 4.6.4 DEVIATION FROM TEST STANDARD 4.6.5 TEST SETUP | 50 51 |
| 4.6.6 TEST RESULTS | 52 |
| 4.7 SURGE TESTING | 53 |
| 4.7.1 TEST SPECIFICATION | 53 |
| 4.7.2 MEASUREMENT INSTRUMENTS | 53 |
| 4.7.3 TEST PROCEDURE | 53 |
| 4.7.4 DEVIATION FROM TEST STANDARD | 54 54 |
| 4.7.5 TEST SETUP 4.7.6 TEST RESULTS | 54 55 |
| 4.8 INJECTION CURRENT TESTING | 55 56 |
| 4.0 INSECTION CONNENT LESTING | 30 |





| Table of Contents | Page |
|--|----------------------------------|
| 4.8.1 TEST SPECIFICATION 4.8.2 MEASUREMENT INSTRUMENTS 4.8.3 TEST PROCEDURE 4.8.4 DEVIATION FROM TEST STANDARD 4.8.5 TEST SETUP 4.8.6 TEST RESULTS | 56 56 56 56 57 58 |
| 4.9 VOLTAGE INTERRUPTION/DIPS TESTING 4.9.1 TEST SPECIFICATION 4.9.2 MEASUREMENT INSTRUMENTS 4.9.3 TEST PROCEDURE 4.9.4 DEVIATION FROM TEST STANDARD 4.9.5 TEST SETUP 4.9.6 TEST RESULTS | 59 59 59 59 59 60 |
| 4.10 POWER-FREQUENCY MAGNETIC FILDS 4.10.1 MEASUREMENT INSTRUMENTS 4.10.2 TEST LEVEL AND PERFORMANCE CRITERION 4.10.3 TEST PROCEDURE 4.10.4 DEVIATION FROM TEST STANDARD 4.10.5 TEST SETUP 4.10.6 TEST RESULTS | 61 61 61 61 62 62 |
| 5. ATTACHMENT 5.1 EUT Test Photo 5.2 EUT Photo | 63 63 67 |





1. GENERAL INFORMATION

1.1 PRODUCT INFORMATION

1. The equipment is Flashlight Luminaires for the use in lighting equipment.

2. The model of this application is only different in shape and appearance, and the others are all the same structure. Does not involve differences in electrical parameters.

3. This test report only reflects the worst data of the test mode.

All tests was performed on model P17R Core.

The EUT passed the test.





1.2 Details about the Test Laboratory

Test Site 1 (CNAS number L6214):

Company name: Dongguan Anci Electronic Technology Co., Ltd.

Address: 1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake

Hi-tech Industrial Development Zone, Dongguan City,

Guangdong Pr., China.

Telephone: +86-769-8507 5888

Fax: +86-769- 8507 5898

Test Site 2 (Subcontract test: CNAS number L0468):

Company name: Guangdong Dongguan Quality Supervision Testing Center

Address: No.2 South Industry Road, Dongguan Songshan Lake

Sci.&Tech. Industrial Park, Guangdong Province, China

Telephone: +86 769 2307 1111

Fax: +86 769 2307 7221



Rev. 3.1

| Standard | Test Item | Test Site |
|--|---|--------------|
| | Conducted Disturbance at the electric power supply interface | 1 |
| | Conducted Disturbance at wired network interfaces other than powersupply | N/A |
| EN IEC 55015:2019 | Conducted Disturbance at local wired ports other than electrical power supply interface | N/A |
| | Radiated Disturbance | 1 |
| | (30MHz to 1GHz) | • |
| | Magnetic Disturbance | 1 |
| | (9KHz to 30MHz) | ı |
| EN 61000-3-2:2014 | Harmonic Current Emission | N/A |
| EN 61000-3-3:2013+A1:2019 | Voltage Fluctuations & Flicker | N/A |
| EN 61000-4-2:2009 | Electrostatic Discharge | 1 |
| EN 61000-4-3:2006 +A1:2008+A2: 2010 | RF electromagnetic field | 2 |
| EN 61000-4-4:2012 | Fast transients | 1 |
| EN 61000-4-5:2014 | Surges | 1 |
| EN 61000-4-6:2014 | Injected Current | 2 |
| EN 61000-4-8:2010 | Power Frequency Magnetic Field | 2 |
| EN 61000-4-11:2004 | Volt. Interruptions Volt. Dips | 1 |

Report No.: EA2006432E 02001



Report No.: EA2006432E 02001 9 of 73



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| Emission | | | | | |
|---------------------------------------|---|--------|----------|--------------------------|--|
| Standard | Test Item | Limits | Judgment | Remark | |
| | Conducted Disturbance at the electric power supply interface | 4.3.1 | PASS | | |
| | Conducted Disturbance at wired network interfaces other than powersupply | 4.3.2 | N/A | | |
| EN IEC 55015:2019 | Conducted Disturbance at local wired ports other than electrical power supply interface | 4.4 | N/A | | |
| | Radiated Disturbance (30MHz to 1GHz) | 4.5.3 | PASS | | |
| | Magnetic Disturbance (9KHz to 30MHz) | 4.5.2 | PASS | | |
| EN IEC 61000-3-2:2019 | Harmonic Current Emission | 7 | PASS | | |
| EN 61000-3-3:2013+A1:2019 | Voltage Fluctuations & Flicker | 5 | N/A | | |
| | Immunity (EN61547:2009) | | | | |
| Section | Test Item | Clause | Judgment | Performan ce Criteria | |
| EN 61000-4-2:2009 | Electrostatic Discharge | 5.2 | PASS | В | |
| EN 61000-4-3:2006 +A1:2008+A1:2010 | RF electromagnetic field | 5.3 | PASS | А | |
| EN 61000-4-4:2012 | Fast transients | 5.4 | PASS | В | |
| EN 61000-4-5:2014 | Surges | 5.5 | PASS | В | |
| EN 61000-4-6:2014 | Injected Current | 5.6 | PASS | А | |
| EN 61000-4-8:2010 | Power Frequency Magnetic Field | 5.7 | PASS | А | |
| EN 61000-4-11:2004 | Volt. Interruptions Volt. Dips | 5.8 | PASS | C/B | |

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

DongGuan Anci Electronic Technology Co., Ltd.
1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.

Phone: 86-769-8507 5888; Fax: 86-769-8507 5898 E-mail: anci@anci.com Rev. 3.1



2.1 MEASUREMENT UNCERTAINTY

Report No.: EA2006432E 02001

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$ where expended uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k=2}$ providing a level of confidence of approximately 95 % $^{\circ}$

A. Conducted Measurement:

| Test Site | Method | Measurement Frequency Range | U · (dB) | NOTE |
|-------------|--------|-----------------------------|----------|------|
| Test Site 1 | ANSI | 9 KHz ~ 30MHz | 3.19 | |

B. Conducted Disturbance at Control Terminals:

| Test Site | Method | Measurement Frequency Range | U · (dB) | NOTE |
|-------------|--------|-----------------------------|----------|------|
| Test Site 2 | ANSI | 9 KHz ~ 30MHz | 3.19 | |

C. Magnetic Disturbance (9KHz to 30MHz) t:

| Test Site | Method | Measurement Frequency Range | U · (dB) | NOTE |
|-------------|--------|-----------------------------|----------|------|
| Test Site 1 | ANSI | 9KHz ~ 30MHz | 2.54 | |

D. Radiated Disturbance (30MHz to 1GHz):

| Test Site | Method | Measurement Frequency Range | Ant. H / V | U · (dB) | NOTE |
|-------------|--------|-----------------------------|---------------|----------|------|
| Test Site 1 | ANSI | 30MHz ~ 200MHz | V | 3.69 | |
| | | 30MHz ~ 200MHz | Н | 3.69 | |
| | | 200MHz ~ 1,000MHz | V | 3.67 | |
| | | 200MHz ~ 1,000MHz | Н | 3.67 | |

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pre-scan mode | | |
|---------------|------------------|--|
| Mode 1 | Normal Operation | |

| Final-scan mode | | |
|-----------------|------------------|--|
| Mode 1 | Normal Operation | |


 $Dong Guan\ Anci\ Electronic\ Technology\ Co.,\ Ltd.$

1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.



2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Report No.: EA2006432E 02001

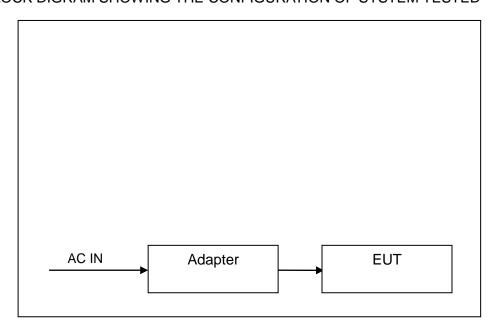

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment | Specification |
|------|-----------|---------------|
| E-1 | N/A | N/A |

| Item | Type of cable |
|------|---------------|
| C-1 | AC Cable |

 $Dong Guan\ Anci\ Electronic\ Technology\ Co.,\ Ltd.$

1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.

ANCI

3. EMISSION TEST

Report No.: EA2006432E 02001

3.1 Conducted Disturbance at Mains Terminals

3.1.1 LIMIT OF CONDUCTED EMISSION(MAINS PORT) (Frequency Range 9KHz-30MHz)

| EDECHENCY (MU-) | | (dBuV) |
|-----------------|------------|-----------|
| FREQUENCY (MHz) | Quasi-peak | Average |
| 0.009-0.05 | 110 | |
| 0.05-0.15 | 90-80 | |
| 0.15 -0.5 | 66 - 56 * | 56 - 46 * |
| 0.50 -5.0 | 56.00 | 46.00 |
| 5.0 -30.0 | 60.00 | 50.00 |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)

Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

| Receiver Parameters | Setting |
|---------------------|--|
| Attenuation | 10 dB |
| Start Frequency | 0.009 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 200Hz (from 9kHz to 150kHz) and 9kHz (from 150kHz to 30MHz). |

3.1.2 MEASUREMENT INSTRUMENTS LIST

| Item | Instr.Code | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|------------|----------------------|---------------|------------------------|------------|------------------|
| 1 | AN-E013 | 3 Loop Antenna | Da Ze | ZN30401 | 2944A09491 | 2021-05-23 |
| 3 | AN-E026 | RF Cable | N/A | ZT06S-NJ-NJ- 3M | 19044021 | 2021-05-23 |
| 4 | AN-E020 | EMI Test Receiver | ROHDE&SCHWARZ | ESCI | 101358 | 2021-05-23 |
| 5 | AN-E058 | 1# Shielded Room | chengyu | 8m*4m*3.3m | N/A | 2022-05-06 |
| 6 | AN-E046 | Test Software | Farad | EZ-EMC Ver:ANCI-8A1 | N/A | N/A |

Remark: "N/A" denotes No Model No. , Serial No. or No Calibration specified.

DongGuan Anci Electronic Technology Co., Ltd.

1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.



3.1.3 TEST PROCEDURE


Report No.: EA2006432E 02001

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation

3.1.5 TEST SETUP

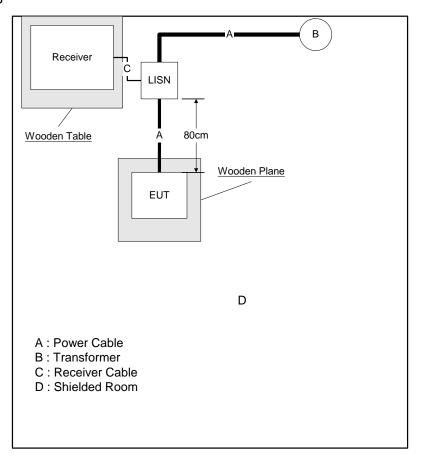

3.1.6 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

DongGuan Anci Electronic Technology Co., Ltd.

1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.





3.1.7 TEST RESULTS

Report No.: EA2006432E 02001

| EUT: | Flashlight | Model No.: | P17R Core |
|--------------|------------------|--------------------|--------------|
| Temperature: | 24℃ | Relative Humidity: | 53% |
| Pressure: | 1008 hPa | Test Power: | AC 230V/50Hz |
| Test Mode: | Normal Operation | | |

Remark:

- (1) Reading in which marked as QP means measurements by using Quasi-Peak Detector, and AV means measurements by using Average Detector.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of <code>『Note』</code>. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 9KHz to 30MHz.






M/N: P17R Core

Op Cond.: Normal Operation / Chargeing

Comment: AC 230V/50Hz Line Under Test: Power Line, Live

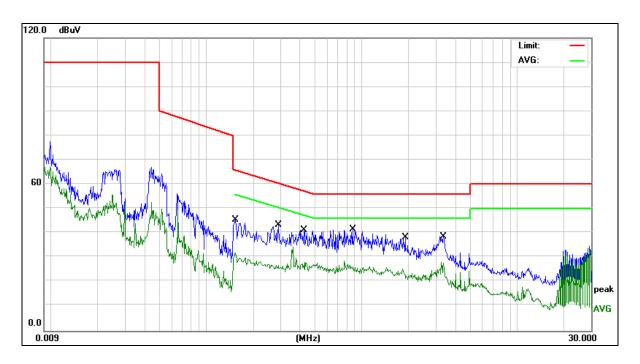

| No. | Frequency | Reading | Factor | Measure- | Limit | Over | Detector | Comment |
|-----|-----------|-------------|--------|------------|--------|--------|----------|---------|
| | (MHz) | Level(dBuV) | (dB) | ment(dBuV) | (dBuV) | (dB) | | |
| 1 | 0.1539 | 34.74 | 9.68 | 44.42 | 65.78 | -21.36 | QP | |
| 2 | 0.1539 | 22.44 | 9.68 | 32.12 | 55.78 | -23.66 | AVG | |
| 3 | 0.2900 | 25.41 | 9.73 | 35.14 | 60.52 | -25.38 | QP | |
| 4 | 0.2900 | 16.82 | 9.73 | 26.55 | 50.52 | -23.97 | AVG | |
| 5 | 0.4260 | 24.90 | 9.76 | 34.66 | 57.33 | -22.67 | QP | |
| 6 * | 0.4260 | 17.23 | 9.76 | 26.99 | 47.33 | -20.34 | AVG | |
| 7 | 0.8780 | 22.86 | 9.78 | 32.64 | 56.00 | -23.36 | QP | |
| 8 | 0.8780 | 15.65 | 9.78 | 25.43 | 46.00 | -20.57 | AVG | |
| 9 | 1.9180 | 18.29 | 9.81 | 28.10 | 56.00 | -27.90 | QP | |
| 10 | 1.9180 | 11.59 | 9.81 | 21.40 | 46.00 | -24.60 | AVG | |
| 11 | 3.3700 | 20.72 | 9.84 | 30.56 | 56.00 | -25.44 | QP | |
| 12 | 3.3700 | 11.43 | 9.84 | 21.27 | 46.00 | -24.73 | AVG | |






M/N: P17R Core

Op Cond.: Normal Operation / Chargeing

Comment: AC 230V/50Hz Line Under Test: Power Line, Neutral

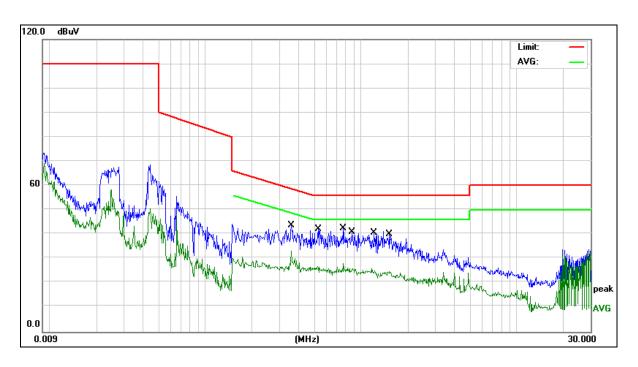

| No. | Frequency | Reading | Factor | Measure- | Limit | Over | Detector | Comment |
|-----|-----------|-------------|--------|------------|--------|--------|----------|---------|
| | (MHz) | Level(dBuV) | (dB) | ment(dBuV) | (dBuV) | (dB) | | |
| 1 | 0.3580 | 27.59 | 9.74 | 37.33 | 58.77 | -21.44 | QP | |
| 2 * | 0.3580 | 23.34 | 9.74 | 33.08 | 48.77 | -15.69 | AVG | |
| 3 | 0.5340 | 21.41 | 9.76 | 31.17 | 56.00 | -24.83 | QP | |
| 4 | 0.5340 | 15.58 | 9.76 | 25.34 | 46.00 | -20.66 | AVG | |
| 5 | 0.7780 | 22.71 | 9.80 | 32.51 | 56.00 | -23.49 | QP | |
| 6 | 0.7780 | 17.27 | 9.80 | 27.07 | 46.00 | -18.93 | AVG | |
| 7 | 0.8780 | 20.73 | 9.78 | 30.51 | 56.00 | -25.49 | QP | |
| 8 | 0.8780 | 14.79 | 9.78 | 24.57 | 46.00 | -21.43 | AVG | |
| 9 | 1.2180 | 19.23 | 9.77 | 29.00 | 56.00 | -27.00 | QP | |
| 10 | 1.2180 | 13.64 | 9.77 | 23.41 | 46.00 | -22.59 | AVG | |
| 11 | 1.5300 | 19.22 | 9.79 | 29.01 | 56.00 | -26.99 | QP | |
| 12 | 1.5300 | 13.37 | 9.79 | 23.16 | 46.00 | -22.84 | AVG | |



3.2 Conducted Disturbance at Control Terminals

3.2.1 Specification Limits

| Disturbance voltage limits at the Control terminals | | | | | |
|---|---------------|----------|--|--|--|
| Frequency range | Limits dB(μV) | | | | |
| | Quasi-peak | Average | | | |
| 0.15MHz to 0.50MHz | 84 to 74 | 74 to 64 | | | |
| 0.50MHz to 30MHz | 74 | 64 | | | |

Notes:

- (1) The limit for radiated test was performed according to as following: CISPR 15.
- (2) The tighter limit applies at the band edges.

3.2.2 MEASUREMENT INSTRUMENTS LIST


| Equipment | Manufacturer | Model No. | Serial No. | Next Cal. |
|---------------|-----------------|-----------|------------|---------------|
| Test Receiver | Rohde & Schwarz | ESCI | 100227 | Oct. 17, 2020 |
| L.I.S.N. | SCHWARZBECK | NSLK8126 | 8126415 | Oct. 17, 2020 |
| ISN | Rohde & Schwarz | ENY81-CA6 | 101564 | Oct. 17, 2020 |
| L.I.S.N. | Rohde & Schwarz | ENV4200 | 100462 | Jun.04,2021 |
| Test Receiver | Rohde & Schwarz | ESR3 | 102520 | May.07,2021 |

3.2.3 TEST PROCEDURE

- A. The EUT was placed on a non-conductive table 0.8 m above a reference ground plane.
- B. The EUT was placed on a non-conductive support 0.1 m above a reference ground plane.
- C. All power was connected to the EUT through an Artificial Mains Network (AMN).
- D. Conducted common mode disturbance voltage measurements on signal ports were made at the output of the Impedance Stabilization Network (ISN) in accordance with Annex C 4.1.6.2. The ISN was placed 0.8m from the boundary of the EUT and bonded to a reference ground plane.
- E. Conducted common mode disturbance current measurements on signal ports were made with a current probe and externally fitted 150 Ω resistor in accordance with Annex C 4.1.6.3.
- F. Conducted common mode disturbance current measurements on signal ports were made with using a combination of a current probe and capacitive voltage probe in accordance with Annex C 4.1.6.4.



3.2.4 TEST SETUP

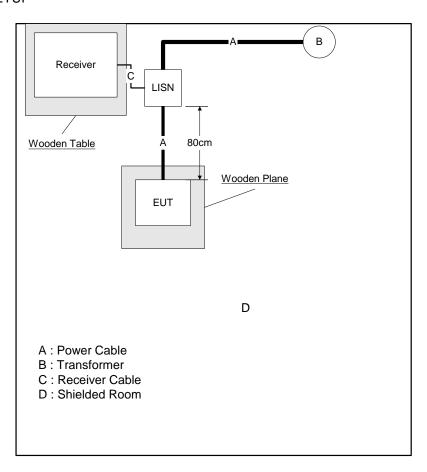

B.2.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

B.2.6 TEST RESULTS

| EUT: | / | Model No.: | / | |
|--------------|---|--------------------|---|--|
| Temperature: | / | Relative Humidity: | / | |
| Pressure: | / | Test Power: | / | |
| Test Mode: | / | | | |

Note:

- 1. This test is arranged according to the placement requirements of 3.2.4.
- 2. Test data see next page
- 3. This test is not applicable for products without dimming.
- 4. When the control line and load line are less than 3 meters, this test is not applicable.

DongGuan Anci Electronic Technology Co., Ltd.

1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.



3.3 Radiated Disturbance (30MHz to 1000MHz)

3.3.1 LIMITS OF RADIATED EMISSION MEASUREMENT (Below 1000MHz)

| FREQUENCY (MHz) | LIMIT (at 3m) | |
|------------------|---------------|--|
| FREQUENCT (WINZ) | dBuV/m | |
| 30 – 230 | 40 | |
| 230 – 1000 | 47 | |

Notes:

- 1) The limit for radiated test was performed according to as following: CISPR 15.
- 2) The tighter limit applies at the band edges
- 3) Emission level (dBuV/m)=20log Emission level (uV/m).
- 4) Calculation formula: Level=Reading+Factor Margin=Level-Limit.

3.3.2 MEASUREMENT INSTRUMENTS LIST

3m Radiated Emission Measurement 30MHz-1GHz


| Item | Instr.Code | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|------------|-----------------------------|--------------------|------------------------|--------------|---------------------|
| 1 | AN-E023 | EMI Test Receiver | Rohde & Schwarz | ESPI | 100502 | 2020-11-28 |
| 2 | AN-E006 | Pre-Amplifier | HP | 8447D | 2727A06172 | 2021-05-23 |
| 3 | AN-E009 | Bilog Antenna | Schwarzbeck | VULB9163 | VULB9163-588 | 2021-05-23 |
| 4 | AN-E033 | RF Cable | N/A | N/A | 6# | 2021-05-23 |
| 5 | AN-E007 | RF Cable | N/A | N/A | 1-1# | 2021-05-23 |
| 6 | AN-E043 | 3m Semi-anechoic Chamber | chengyu | 9m*6m*6m | N/A | 2022-05-19 |
| 7 | AN-E045 | Test Software | Farad | EZ-EMC Ver:ANCI-3A1 | N/A | N/A |

3m Radiated Emission Measurement 1GHz-18GHz

| Item | Instr.Code | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|------------|-----------------------------|-----------------|------------------------|----------------|------------------|
| 1 | AN-E037 | Spectrum Analyzer | Rohde & Schwarz | FSV40 | 102257 | 2020-11-28 |
| 2 | AN-E015 | Low noise Amplifiers | A-INFO | LA1018N4009 | J1013130524001 | 2021-05-23 |
| 3 | AN-E014 | Horn antenna | A-INFO | LB-10180-SF | J2031090612123 | 2021-05-23 |
| 4 | AN-E018 | RF Cable | N/A | N/A | 1-2# | 2021-05-23 |
| 5 | AN-E004 | RF Cable | N/A | N/A | 7# | 2021-05-23 |
| 6 | AN-E043 | 3m Semi-anechoic Chamber | chengyu | 9m*6m*6m | N/A | 2022-05-19 |
| 7 | AN-E045 | Test Software | Farad | EZ-EMC Ver:ANCI-3A1 | N/A | N/A |

Remark: "N/A" denotes No Model No. / Serial No. and No Calibration specified.

¹⁻² Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.





3.3.3 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m or 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item -EUT Test Photos.

No deviation




Rev. 3.1

3.3.5 TEST SETUP

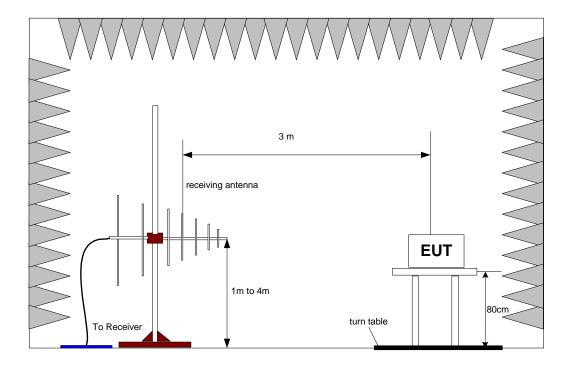

3.3.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 3.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.





3.3.7 TEST RESULTS

| EUT: | Flashlight | Model No.: | P17R Core |
|--------------|------------------|--------------------|-------------------------------|
| Temperature: | 23℃ | Relative Humidity: | 57% |
| Pressure: | 1008 hPa | Test Power: | AC 230V/50Hz and Battery 6.4V |
| Test Mode: | Normal Operation | | |

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Detector or Peak Detector.
- (2) All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1GHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.





Rev. 3.1


M/N: P17R Core

Op Cond.: Normal Operation / Charging

Comment: AC 230V/50Hz

Test Spec: Horizontal

Detailed results are shown below

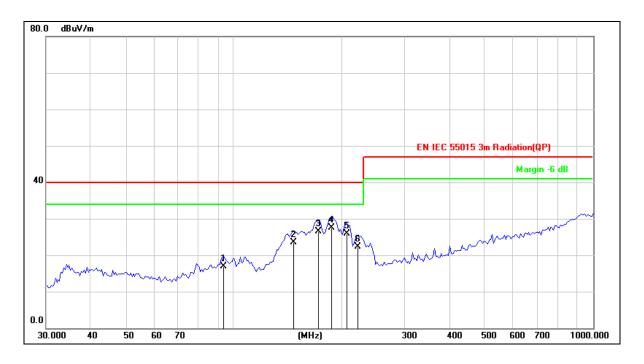

| N | o. Frequen | cy Readin | ng Factor | Level | Limit | Margin | Det. | Height | Azimuth | Remark |
|---|------------|-------------|-----------|----------|----------|--------|------|--------|---------|--------|
| | (MHz | (dBuV | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | | (cm) | (deg) | |
| 1 | 93.768 | 28.82 | -11.84 | 16.98 | 40.00 | -23.02 | QP | | | |
| 2 | 146.630 | 4 37.38 | -13.80 | 23.58 | 40.00 | -16.42 | QP | | | |
| 3 | 171.693 | 3 38.65 | -12.06 | 26.59 | 40.00 | -13.41 | QP | | | |
| 4 | * 187.424 | 1 38.38 | -10.82 | 27.56 | 40.00 | -12.44 | QP | | | |
| 5 | 206.397 | 6 35.81 | -9.89 | 25.92 | 40.00 | -14.08 | QP | | | |
| 6 | 221.392 | 1 31.89 | -9.53 | 22.36 | 40.00 | -17.64 | QP | | | |





M/N: P17R Core

Op Cond.: Normal Operation / Charging

Comment: AC 230V/50Hz

Test Spec: Vertical

Detailed results are shown below



| No. | Frequency | Reading | Factor | Level | Limit | Margin | Det. | Height | Azimuth | Remark |
|-----|-----------|---------|--------|----------|----------|--------|------|--------|---------|--------|
| | (MHz) | (dBuV) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | | (cm) | (deg) | |
| 1 | 34.5173 | 44.07 | -13.69 | 30.38 | 40.00 | -9.62 | QP | | | |
| 2 | 40.4172 | 41.19 | -12.65 | 28.54 | 40.00 | -11.46 | QP | | | |
| 3 | 78.6888 | 37.58 | -14.95 | 22.63 | 40.00 | -17.37 | QP | | | |
| 4 | 92.9501 | 38.29 | -12.02 | 26.27 | 40.00 | -13.73 | QP | | | |
| 5 | 139.1172 | 40.17 | -13.85 | 26.32 | 40.00 | -13.68 | QP | | | |
| 6 * | 206.3976 | 42.35 | -9.89 | 32.46 | 40.00 | -7.54 | QP | | | |






Rev. 3.1

M/N: P17R Core


Op Cond.: Normal Operation / Dischargeing

Comment: Battery 6.4V
Test Spec: Horizontal

Detailed results are shown below

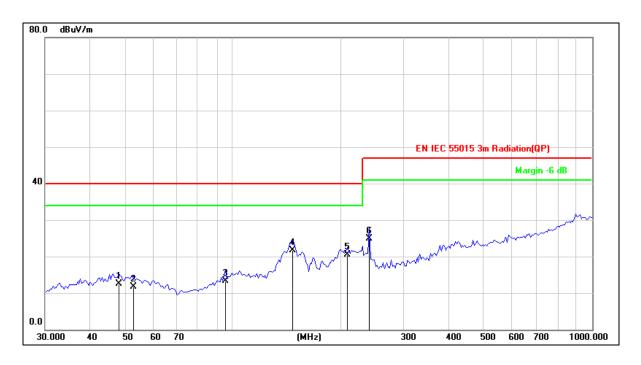

| No | . Frequency | Reading | Factor | Level | Limit | Margin | Det. | Height | Azimuth | Remark |
|----|-------------|---------|--------|----------|----------|--------|------|--------|---------|--------|
| | (MHz) | (dBuV) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | | (cm) | (deg) | |
| 1 | 48.1626 | 24.14 | -11.70 | 12.44 | 40.00 | -27.56 | QP | | | |
| 2 | 53.0382 | 23.70 | -11.99 | 11.71 | 40.00 | -28.29 | QP | | | |
| 3 | 95.4270 | 24.79 | -11.50 | 13.29 | 40.00 | -26.71 | QP | | | |
| 4 | 146.6304 | 35.57 | -13.80 | 21.77 | 40.00 | -18.23 | QP | | | |
| 5 | 208.2148 | 30.25 | -9.84 | 20.41 | 40.00 | -19.59 | QP | | | |
| 6 | 239.5670 | 33.89 | -9.08 | 24.81 | 47.00 | -22.19 | QP | | | |





Rev. 3.1


M/N: P17R Core

Op Cond.: Normal Operation / Dischargeing

Comment: Battery 6.4V

Test Spec: Vertical

Detailed results are shown below

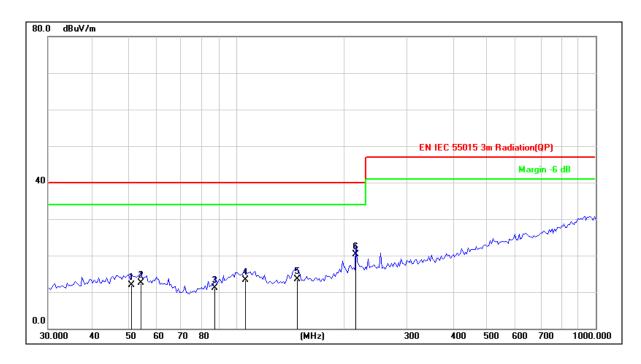

| No. | Frequency | Reading | Factor | Level | Limit | Margin | Det. | Height | Azimuth | Remark |
|-----|-----------|---------|--------|----------|----------|--------|------|--------|---------|--------|
| | (MHz) | (dBuV) | (dB/m) | (dBuV/m) | (dBuV/m) | (dB) | | (cm) | (deg) | |
| 1 | 51.2106 | 23.63 | -11.69 | 11.94 | 40.00 | -28.06 | QP | | | |
| 2 | 54.4516 | 24.80 | -12.22 | 12.58 | 40.00 | -27.42 | QP | | | |
| 3 | 87.4177 | 24.25 | -13.20 | 11.05 | 40.00 | -28.95 | QP | | | |
| 4 | 106.0126 | 23.99 | -10.65 | 13.34 | 40.00 | -26.66 | QP | | | |
| 5 | 147.9214 | 27.23 | -13.78 | 13.45 | 40.00 | -26.55 | QP | | | |
| 6 * | 215.6456 | 29.91 | -9.66 | 20.25 | 40.00 | -19.75 | QP | | | |







3.4 MAGNETIC EMISSION MEASUREMENT

3.4.1 MEASUREMENT INSTRUMENTS LIST

Report No.: EA2006432E 02001

| Item | Instr.Code | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|------------|-------------------|---------------|------------------------|------------|------------------|
| 1 | AN-E013 | 3 Loop Antenna | Da Ze | ZN30401 | 2944A09491 | 2021-05-23 |
| 3 | AN-E026 | RF Cable | N/A | ZT06S-NJ-NJ-3M | 19044021 | 2021-05-23 |
| 4 | AN-E020 | EMI Test Receiver | ROHDE&SCHWARZ | ESCI | 101358 | 2021-05-23 |
| 5 | AN-E058 | 1# Shielded Room | chengyu | 8m*4m*3.3m | N/A | 2022-05-06 |
| 6 | AN-E046 | Test Software | Farad | EZ-EMC Ver:ANCI-8A1 | N/A | N/A |


Remark: "N/A" denotes No Model No. / Serial No. and No Calibration specified.

3.4.2 LIMITS OF MAGNETIC EMISSION MEASUREMENT

| Francisco Panas | Limits for loop diameter dB(A) ⁽¹⁾ | | | | |
|-----------------|---|--|--|--|--|
| Frequency Range | 2m | | | | |
| 9KHz-70KHz | 88 | | | | |
| 70KHz-150KHz | 88-58 | | | | |
| 150KHz-3.0MHz | 58-22 | | | | |
| 3.0MHz-30MHz | 22 | | | | |


Report No.: EA2006432E 02001 28 of 73



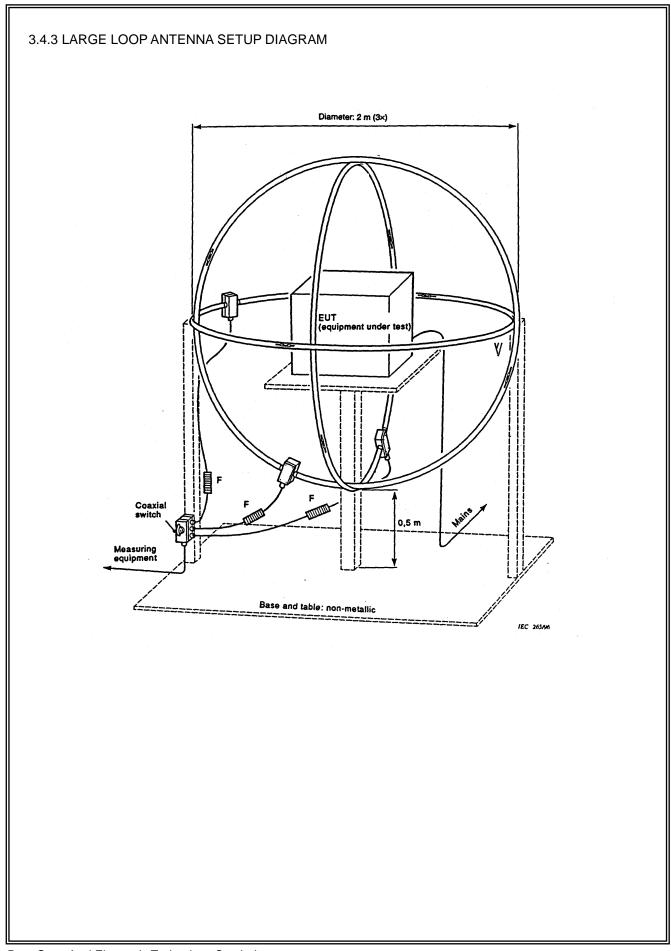

DongGuan Anci Electronic Technology Co., Ltd. 1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.

Phone: 86-769-8507 5888; Fax: 86-769-8507 5898 E-mail: anci@anci.com





3.4.4 OPERATING CONDITIONS OF THE EUT

The exercise program used during conducted emission measurement was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below:

- 1. Setup the EUT and simulators as shown on 3.3.
- 2. Turn on the power of all equipments.
- 3. Start test.

3.4.5 MAGNETIC EMISSION DATA

The quasi-peak limits of the magnetic component of the radiated electromagnetic disturbance field strength in the frequency range **9kHz to 30MHz** measured as a current in 2m, loop antennas around the lighting equipment.

The measurement range of radiated emission, which is from **9kHz to 30MHz**, was investigated. All readings are quasi-peak values with a proper resolution Bandwidth. The initial step in collecting radiated emission data is a spectrum analyzer peak scans of the measurement range for all the test modes and then use test receiver for final measurement. Then the worst modes were reported the following data pages.





3.4.6 TEST RESULTS

| EUT: | Flashlight | Model No.: | P17R Core |
|--------------|------------------|--------------------|-------------------------------|
| Temperature: | 23℃ | Relative Humidity: | 57% |
| Pressure: | 1008 hPa | Test Power: | AC 230V/50Hz and Battery 6.4V |
| Test Mode: | Normal Operation | · | |

Remarks:

- 1. Measurement = Reading + Factor
- 2. Over Limit (Margin Value)=Measurement level-Limit value.






M/N: P17R Core

Op Cond.: Normal Operation / Dischargeing

Comment: Battery 6.4V

Test Spec.: X (2m)

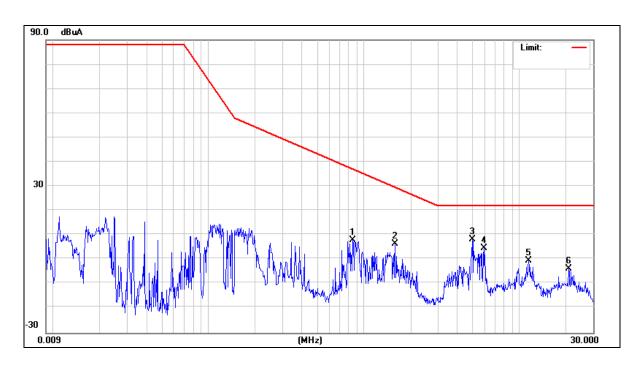

| No. | Frequency | Reading | Factor | Measure- | Limit | Over | Detector | Comment |
|-----|-----------|-------------|--------|------------|--------|--------|----------|---------|
| | (MHz) | Level(dBuA) | (dB) | ment(dBuA) | (dBuA) | (dB) | | |
| 1 | 0.8497 | -2.63 | 10.45 | 7.82 | 37.11 | -29.29 | peak | |
| 2 | 1.5940 | -3.92 | 10.41 | 6.49 | 29.57 | -23.08 | peak | |
| 3 * | 5.0339 | -2.18 | 10.47 | 8.29 | 22.00 | -13.71 | peak | |
| 4 | 5.9500 | -5.78 | 10.47 | 4.69 | 22.00 | -17.31 | peak | |
| 5 | 11.5777 | -10.78 | 10.45 | -0.33 | 22.00 | -22.33 | peak | |
| 6 | 20.9340 | -14.25 | 10.41 | -3.84 | 22.00 | -25.84 | peak | |






M/N: P17R Core


Op Cond.: Normal Operation / Dischargeing

Comment: Battery 6.4V

Test Spec.: Y (2m)

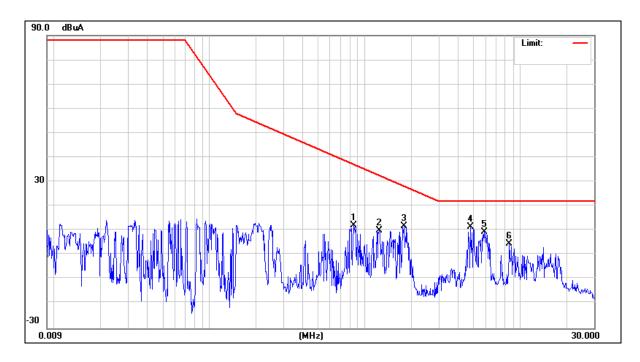

| No. | Frequency | Reading | Factor | Measure- | Limit | Over | Detector | Comment |
|-----|-----------|-------------|--------|------------|--------|--------|----------|---------|
| | (MHz) | Level(dBuA) | (dB) | ment(dBuA) | (dBuA) | (dB) | | |
| 1 | 0.8578 | 1.75 | 10.45 | 12.20 | 37.04 | -24.84 | peak | |
| 2 | 1.2459 | -0.46 | 10.45 | 9.99 | 32.56 | -22.57 | peak | |
| 3 | 1.7900 | 1.59 | 10.39 | 11.98 | 28.20 | -16.22 | peak | |
| 4 * | 4.8018 | 1.18 | 10.46 | 11.64 | 22.00 | -10.36 | peak | |
| 5 | 5.8859 | -0.94 | 10.47 | 9.53 | 22.00 | -12.47 | peak | |
| 6 | 8.5980 | -5.83 | 10.46 | 4.63 | 22.00 | -17.37 | peak | |






M/N: P17R Core


Op Cond.: Normal Operation / Dischargeing

Comment: Battery 6.4V

Test Spec.: Z (2m)

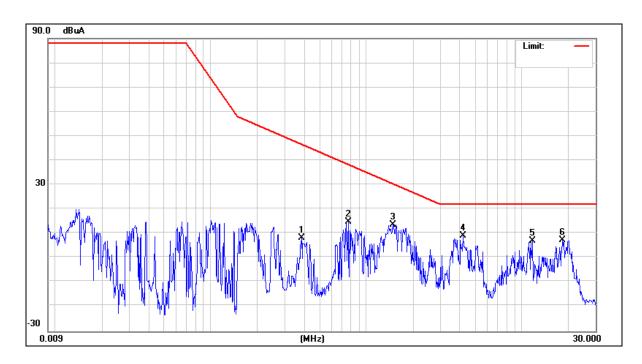

| No. | Frequency | Reading | Factor | Measure- | Limit | Over | Detector | Comment |
|-----|-----------|-------------|--------|------------|--------|--------|----------|---------|
| | (MHz) | Level(dBuA) | (dB) | ment(dBuA) | (dBuA) | (dB) | | |
| 1 | 0.3860 | -2.28 | 10.42 | 8.14 | 46.64 | -38.50 | peak | |
| 2 | 0.7740 | 4.51 | 10.44 | 14.95 | 38.28 | -23.33 | peak | |
| 3 | 1.4979 | 3.18 | 10.43 | 13.61 | 30.34 | -16.73 | peak | |
| 4 * | 4.2339 | -1.22 | 10.44 | 9.22 | 22.00 | -12.78 | peak | |
| 5 | 11.8420 | -3.43 | 10.45 | 7.02 | 22.00 | -14.98 | peak | |
| 6 | 18.4054 | -3.20 | 10.42 | 7.22 | 22.00 | -14.78 | peak | |






M/N: P17R Core

Op Cond.: Normal Operation / Chargeing

AC 230V/50Hz Comment:

Test Spec.: X (2m)

Detailed results are shown below

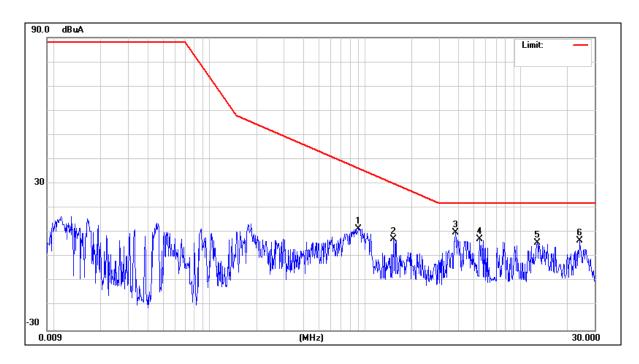

| No. | Frequency | Reading | Factor | Measure- | Limit | Over | Detector | Comment |
|-----|-----------|-------------|--------|------------|--------|--------|----------|---------|
| | (MHz) | Level(dBuA) | (dB) | ment(dBuA) | (dBuA) | (dB) | | |
| 1 | 0.9060 | 1.01 | 10.46 | 11.47 | 36.39 | -24.92 | peak | |
| 2 | 1.5260 | -2.66 | 10.10 | 7.44 | 30.12 | -22.68 | peak | |
| 3 * | 3.8420 | 3.35 | 6.61 | 9.96 | 22.00 | -12.04 | peak | |
| 4 | 5.4698 | 2.59 | 4.90 | 7.49 | 22.00 | -14.51 | peak | |
| 5 | 12.8856 | 4.92 | 0.94 | 5.86 | 22.00 | -16.14 | peak | |
| 6 | 24.2179 | 11.69 | -4.89 | 6.80 | 22.00 | -15.20 | peak | |

Phone: 86-769-8507 5888; Fax: 86-769-8507 5898 E-mail: anci@anci.com Rev. 3.1






M/N: P17R Core


Op Cond.: Normal Operation / Chargeing

Comment: AC 230V/50Hz

Test Spec.: Y (2m)

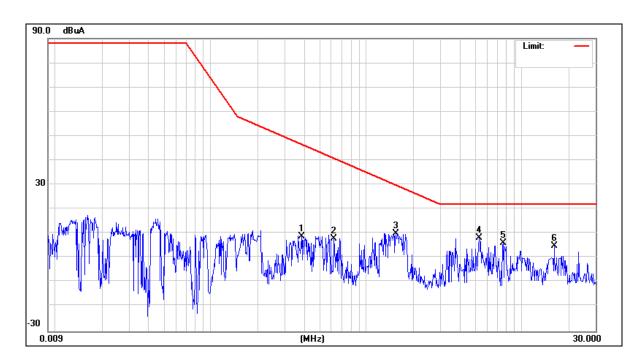

| 1 | No. | Frequency | Reading | Factor | Measure- | Limit | Over | Detector | Comment |
|---|-----|-----------|-------------|--------|------------|--------|--------|----------|---------|
| | | (MHz) | Level(dBuA) | (dB) | ment(dBuA) | (dBuA) | (dB) | | |
| ſ | 1 | 0.3860 | -1.56 | 10.55 | 8.99 | 46.64 | -37.65 | peak | |
| | 2 | 0.6219 | -2.24 | 10.32 | 8.08 | 40.91 | -32.83 | peak | |
| ſ | 3 | 1.5540 | -0.05 | 10.09 | 10.04 | 29.90 | -19.86 | peak | |
| ſ | 4 * | 5.3338 | 3.25 | 5.04 | 8.29 | 22.00 | -13.71 | peak | |
| | 5 | 7.6740 | 3.21 | 2.94 | 6.15 | 22.00 | -15.85 | peak | |
| | 6 | 16.2056 | 5.82 | -0.76 | 5.06 | 22.00 | -16.94 | peak | |





M/N: P17R Core

Op Cond.: Normal Operation / Chargeing

Comment: AC 230V/50Hz

Test Spec.: Z (2m)

Detailed results are shown below



| No. | Frequency | Reading | Factor | Measure- | Limit | Over | Detector | Comment |
|-----|-----------|-------------|--------|------------|--------|--------|----------|---------|
| | (MHz) | Level(dBuA) | (dB) | ment(dBuA) | (dBuA) | (dB) | | |
| 1 | 0.2379 | 2.80 | 10.46 | 13.26 | 52.45 | -39.19 | peak | |
| 2 | 0.6860 | 2.98 | 10.42 | 13.40 | 39.73 | -26.33 | peak | |
| 3 | 1.1180 | 1.81 | 10.47 | 12.28 | 33.86 | -21.58 | peak | |
| 4 * | 5.3940 | -2.94 | 10.47 | 7.53 | 22.00 | -14.47 | peak | |
| 5 | 10.4977 | -7.55 | 10.46 | 2.91 | 22.00 | -19.09 | peak | |
| 6 | 16.5940 | -4.76 | 10.43 | 5.67 | 22.00 | -16.33 | peak | |



3.5 HARMONICS CURRENT MEASUREMENT

3.5.1 LIMITS OF HARMONICS CURRENT MEASUREMENT

Table 2 - Limits for Class C equipment a

| Harmonic order | Maximum permissible harmonic current expressed as a percentage of the input current at the fundamental frequency |
|--|--|
| h | % |
| 2 | 2 |
| 3 | 30 ⋅ λ ^b |
| 5 | 10 |
| 7 | 7 |
| 9 | 5 |
| $11 \le h \le 39$ (odd harmonics only) | 3 |

^a For some Class C products, other emission limits apply (see 7.4).

Rated Power > 25W

b λ is the circuit power factor.



Rev. 3.1

3.5.2 MEASUREMENT INSTRUMENTS LIST

| Item | Instr.Code | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|------------|---------------------------------|--------------|---------------------------|------------|------------------|
| 1 | AN-E036 | Harmonic and Fliker Analyzer | EMC PARTNER | Harmonics 1000-1P 230V | 0241 | 2021-05-23 |

Remark: "N/A" denotes No Model No. / Serial No. and No Calibration specified.


3.5.3 TEST PROCEDURE

- a. Test was performed according to the procedures specified in Clause 5.0 of IEC555-2 and/or Sub-clause 6.2 of EN IEC 61000-3-2 depend on which standard adopted for compliance measurement.
- b. All types of harmonic current and/or voltage fluctuation in this report are assessed by direct measurement using flicker-meter.
- c. For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.5.4 DEVIATION FROM TEST STANDARD

No deviation

3.5.5 TEST SETUP

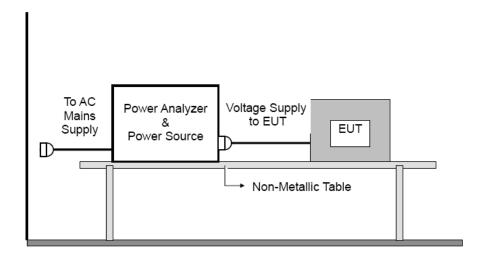

3.5.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 3.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

DongGuan Anci Electronic Technology Co., Ltd.

1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.






3.5.7 TEST RESUL

| EUT: | / | Model No.: | / |
|------------------|---|--------------------|---|
| Temperature: | / | Relative Humidity: | / |
| Pressure: | / | Test Power: | / |
| Observation Time | / | Test Mode | / |
| | | | |

Remark:

- (1) This test is not applicable for DC input products.
- (2) Lamps with input power less than 25W are not suitable for this test.
- (3) Test data see next page.





3.6 VOLTAGE FLUCTUATION AND FLICKS MEASUREMENT

3.6.1 LIMITS OF VOLTAGE FLUCTUATION AND FLICKSMEASUREMENT

| Tests | Li | mits | Descriptions | | | |
|-------|--------------------|---------------------|----------------------------------|--|--|--|
| | IEC555-3 | IEC/EN 61000-3-2 | Descriptions | | | |
| Pst | ≤ 1.0, Tp= 10 min. | ≤ 1.0, Tp= 10 min. | Short Term Flicker Indicator | | | |
| Plt | N/A | ≤ 0.65, Tp=2 hr. | Long Term Flicker Indicator | | | |
| dc | ≤ 3 % | ≤ 3.3 % | Relative Steady-State V-Chang | | | |
| dmax | ≤ 4 % | ≤ 4 % | Maximum Relative V-change | | | |
| d (t) | N/A | ≤ 3.3% for > 500 ms | Relative V-change characteristic | | | |

3.6.2 MEASUREMENT INSTRUMENTS LIST

| Item | Instr.Code | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|------------|------------------------------|--------------|---------------------------|------------|------------------|
| 1 | AN-E036 | Harmonic and Fliker Analyzer | EMC PARTNER | Harmonics 1000-1P 230V | 0241 | 2021-05-23 |

Remark: "N/A" denotes No Model No. / Serial No. and No Calibration specified.

3.6.3 TEST PROCEDURE

a. Harmonic Current Test:

Test was performed according to the procedures specified in Clause 5.0 of IEC555-2 and/or Sub-clause 6.2 of IEC/EN 61000-3-2 depend on which standard adopted for compliance measurement.

- b. Fluctuation and Flickers Test:
 - Tests was performed according to the Test Conditions/Assessment of Voltage Fluctuations specified in Clause 5.0/6.0 of IEC555-3 and/or Clause 6.0/4.0 of IEC/EN 61000-3-3 depend on which standard adopted for compliance measurement.
- c. All types of harmonic current and/or voltage fluctuation in this report are assessed by direct measurement using flicker-meter.
- d. For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.6.4 DEVIATION FROM TEST STANDARD


No deviation

DongGuan Anci Electronic Technology Co., Ltd.

1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.



3.6.5 TEST SETUP

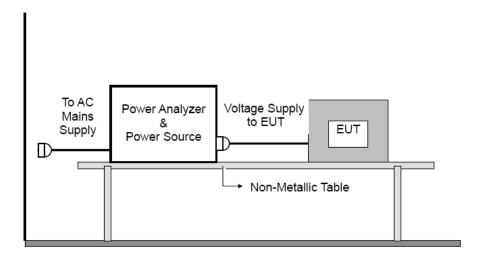

3.6.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 3.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

3.6.7 TEST RESULTS

| EUT: | / | Model No.: | 1 |
|------------------|---|--------------------|---|
| Temperature: | / | Relative Humidity: | / |
| Pressure: | / | Test Power: | / |
| Observation Time | / | Test Mode | / |
| | | | |

Remark:

- (1) This test is not applicable for DC input products.
- (2) Lamps with input power less than 600W are not applicable for this test.
- (3) Test data see next page.

DongGuan Anci Electronic Technology Co., Ltd.

1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.



4. EMC IMMUNITY TEST


Report No.: EA2006432E 02001

4.1 STANDARD COMPLIANCE/SERVRITY LEVEL/CRITERIA

| Tests Standard No. | Test Specification | Test Mode Test Ports | Perform. Criteria | Remark |
|---|---|---|----------------------|--------|
| 1. ESD IEC/EN 61000-4-2 | 8KV air discharge 4KV contact discharge | Direct Mode | В | PASS |
| IEG/EIN 01000-4-2 | 4KV HCP discharge 4KV VCP discharge | Indirect Mode | В | PASS |
| 2. RS IEC/EN 61000-4-3 | 80 MHz to 1000 MHz 3V/m(rms), 1 KHz, 80%, AM modulated | Enclosure | А | PASS |
| 3. EFT/Burst | 1.0KV(peak) 5/50ns Tr/Th 5KHz Repetition Freq. | Switching LED string light Port | В | PASS |
| IEC/EN 61000-4-4 | 0.5 KV(peak) 5/50ns Tr/Th 5KHz Repetition Freq. | CTL/Signal Data Line Port | В | N/A |
| 4. Surges IEC/EN 61000-4-5 | For Self-ballast lamp and semi-luminaries: L-N: 0.5 KV L-PE, N-PE: 1 KV For luminaries and independent auxiliary: ≤ 25W: L-N: 0.5 KV L-PE, N-PE: 1 KV >25W: L-N: 1KV L-PE, N-PE: 2 KV 1.2/50(8/20) Tr/Th us | L-N | С | PASS |
| 5 Injected Current IEC/EN 61000-4-6 | 0.15 MHz to 80 MHz 3V(rms), 1KHz 80%, AM Modulated 150Ω source impedance | AC Power Port DC Power Port CTL/Signal Port | А | PASS |
| 6. Power Frequency Magnetic Field IEC/EN 61000-4-8 | 50 Hz, 3A/m | Enclosure | А | PASS |
| 7. Volt. Interruptions Volt. Dips IEC/EN 61000-4-11 | Voltage dip 30% Interruption 100% | 70% / 0% | B/C | PASS |

* Remark:

- (1) "N/A": denotes test is not applicable in this Test Report.
- (2) Voltage dip: 30% reduction Performance Criteria **C**Voltage Interruption: 100% reduction Performance Criteria **C**






4.2 GENERAL PERFORMANCE CRITERIA

According to **EN61547:2009** standard, the general performance criteria as following:

| Criterion A | During the test no change of the luminous intensity shall be observed and the regulating control, if any shall operate during the test as intended. |
|-------------|--|
| Criterion B | During the test the luminous intensity may change to any value. After the test the luminous intensity shall be restored to its initial value within 1 min. Regulating controls need not function during the test, but after the test the mode of the control shall be the same as before the test provided that during the test no mode changing commands were given. |
| Criterion C | During and after the test any change of the luminous intensity is allowed and the lamps(s) ma be extinguished. After the test, within 30 min, all function shall return to normal if necessary by temporary interruption of the mains supply and/or operating the regulating control. Additional requirement for lighting equipment incorporating a starting device.: After the test the lighting equipment is switched off. After half an hour it is switched on again. The lighting equipment shall start and operate as intended. |

4.3 GENERAL PERFORMANCE CRITERIA TEST SETUP

The EUT tested system was configured as the statements of **3.1.6** Unless otherwise a special operating condition is specified in the follows during the testing.





Rev. 3.1

4.4 ESD TESTING

4.4.1 TEST SPECIFICATION

| Basic Standard: | IEC/EN 61000-4-2 |
|----------------------|---|
| Discharge Impedance: | 330 ohm / 150 pF |
| Required Performance | В |
| Discharge Voltage: | Air Discharge: 2kV/4kV/8kV (Direct) |
| | Contact Discharge: 2kV/4kV (Direct/Indirect) |
| | , , , , , , , , , , , , , , , , , , , |
| Polarity: | Positive & Negative |
| Number of Discharge: | Air Discharge: min. 10 times at each test point |
| | Contact Discharge: min. 200 times in total |
| Discharge Mode: | Single Discharge |
| Discharge Period: | 1 second minimum |

4.4.2 MEASUREMENT INSTRUMENTS

| Item | Instr.Code | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|------------|----------------------|--------------|-----------|------------|------------------|
| 1 | AN-E002 | ESD Simulator | Prima | ESD61002B | PR13012530 | 2021-05-23 |

Remark: "N/A" denotes No Model No. / Serial No. and No Calibration specified.

4.4.3 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

a. Contact discharge was applied to conductive surfaces and coupling planes of the EUT. During the test, it was performed with single discharges. For the single discharge time between successive single discharges was at least 1 second. The EUT shall be exposed to at least 200 discharges, 100 each at negative and positive polarity, at a minimum of four test points. One of the test points shall be subjected to at least 50 indirect discharges to the center of the front edge of the horizontal coupling plane. The remaining three test points shall each receive at least 50 direct contact discharges.

If no direct contact test points are available, then at least 200 indirect discharges shall be applied in the indirect mode. Test shall be performed at a maximum repetition rate of one discharge per second. Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

Horizontal Coupling Plane (HCP):

The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.


- b. Air discharges at insulation surfaces of the EUT.
 - It was at least ten single discharges with positive and negative at the same selected point.
- c. For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation


DongGuan Anci Electronic Technology Co., Ltd.

1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.







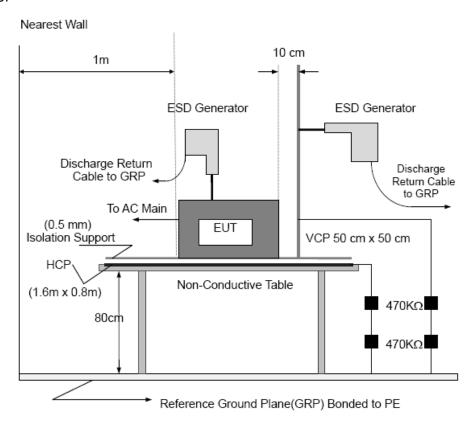

Note:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test, was installed in a representative system as described in section 7 of IEC /EN 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC/EN 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.



4.4.6 TEST RESULTS

Report No.: EA2006432E 02001

| Mode | | Air Discharge | | | | | | | | | Con | tact | Discl | narge | | |
|----------|----|---------------|----|----|----|----|----|----|------|---|-----|------|-------|-------|-----|---|
| | 21 | (V | 41 | ΚV | 81 | ΚV | 12 | K۷ | 2KV | | 4KV | | 6KV | | 8KV | |
| Location | Р | Ν | Р | N | Р | N | Р | Ν | Р | N | Р | N | Р | N | Р | N |
| 1 | 1 | - | Α | Α | В | В | | 1 | 1 | | - | | | | | |
| 2 | | | | | | | | | Α | Α | В | В | | | | |
| 3 | - | | | | | | | | | | | | | | | |
| 4 | | | | | | | | | | | | | | | | |
| 5 | | | | | | | | | | | | | | | | |
| 6 | - | | | | | | | | | | | | | | | |
| 7 | | | | | | | | | | | | | | | | |
| 8 | | | | | - | | | | | | | | | | | |
| 9 | - | | | | | | | | | | | | | | | |
| Criteria | | В | | | | | | | В | | | | | | | |
| Result | | В | | | | | | | В | | | | | | | |
| Judgment | | PASS | | | | | | | PASS | | | | | | | |

| Mode | | HCP Discharge | | | | | | VCP Discharge | | | | | | | | |
|----------|----|---------------|---|------------|----|------------|----------|---------------|----|------------|----|-----------|----|------------|----|------------|
| | 21 | (V | 4 | (V | 61 | (V | 81 | (V | 21 | (V | 41 | (V | 61 | (V | 81 | (V |
| Location | Р | N | Р | N | Р | N | Р | Ν | Р | N | Р | N | Р | N | Р | N |
| 1 | - | | Α | Α | | | | | - | | Α | Α | | | | |
| 2 | | | Α | Α | | | | | | | Α | Α | | | | |
| 3 | | | Α | Α | - | | | | | | Α | Α | - | | | |
| 4 | - | | Α | Α | | | | | | | Α | Α | | | | |
| Criteria | | В | | | | | <u> </u> | В | | | | | | | | |
| Result | | Α | | | | | A | | | | | | | | | |
| Judgment | | PASS | | | | | | | | PAS | SS | | | | | |

Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) Test condition:

Direct discharges: Minimum 20 times (Positive/Negative) at each point.

Air discharges / Indirect (HCP/VCP): Minimum 20 times (Positive/Negative) at each point.

- 3) Test location(s) in which discharge (Air and contact discharge) to be described as following
- 4) The Indirect (HCP/VCP) discharges description of test point as following: 1.left side 2.right side 3.front side 4.rear side
- 5) N/A denotes test is not applicable in this test report

Test Point:

| No | Description | No | Description | No | Description |
|----|-------------------|----|-------------|----|-------------|
| 1 | Output 5Points | 4 | | | |
| 2 | Non-metal 8Points | 5 | | | |
| 3 | DC Input 6Points | 6 | | | |

DongGuan Anci Electronic Technology Co., Ltd.

1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.





4.5 RS TESTING

4.5.1 TEST SPECIFICATION

Report No.: EA2006432E 02001

| Basic Standard: | IEC/EN 61000-4-3 |
|----------------------|------------------------------------|
| Required Performance | A |
| Frequency Range: | 80 MHz - 1000 MHz |
| Field Strength: | 3 V/m |
| Modulation: | 1kHz Sine Wave, 80%, AM Modulation |
| Frequency Step: | 1 % of fundamental |
| Polarity of Antenna: | Horizontal and Vertical |
| Test Distance: | 3 m |
| Antenna Height: | 1.5 m |
| Dwell Time: | at least 3 seconds |

4.5.2 MEASUREMENT INSTRUMENTS

| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|--------------------------------|--------------|-------------|------------|------------------|
| 1 | Signal Generator | Aglilet | N517113-50B | MY53050160 | 2020-10-17 |
| 2 | Amplifier A&R | | 150W1000M3 | 313157 | 2020-10-17 |
| 3 | Amplifier | A&R | 50SIG6M2 | 0342835 | 2020-10-17 |
| 4 | Log-periodic Antenna | SCHWARZBECK | STLP 9128E | 9128E-012 | 2021-01-08 |
| 5 | Microwave log-periodic antenna | SCHWARZBECK | STLP 9149 | 9149.222 | 2020-10-17 |
| 6 | Isotropic Field Probe | A&R | FL700 | 0342652 | 2020-10-17 |
| 7 | 10 meter anechoic chamber | Albatross | 10m | 1 | 2021-06-13 |

Remark: "N/A" denotes No Model No. / Serial No. and No Calibration specified.

4.5.3 TEST PROCEDURE

The EUT and support equipment, which are placed on a table that is 0.8 meter above ground and the testing was performed in a fully-anechoic chamber.

The testing distance from antenna to the EUT was 3 meters.

The other condition as following manner:

- a. The field strength level was 3V/m.
- b. The frequency range is swept from 80 MHz to 1000 MHz, with the signal 80%amplitude modulated with a 1kHz sine wave. The rate of sweep did not exceed 1.5x 10-3 decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- c. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- d. The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.5.4 DEVIATION FROM TEST STANDARD


No deviation

DongGuan Anci Electronic Technology Co., Ltd.

1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.





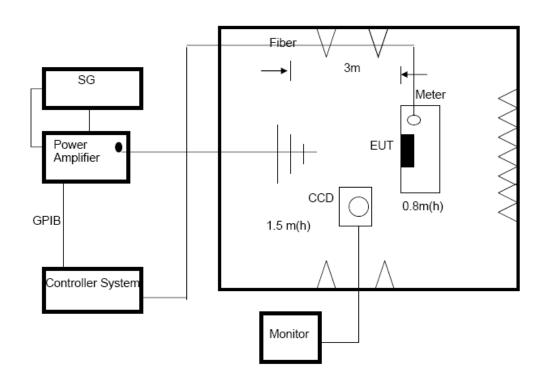

Note:

TABLE-TOP EQUIPMENT


The EUT installed in a representative system as described in section 7 of IEC/EN 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

FLOOR-STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

DongGuan Anci Electronic Technology Co., Ltd.

1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.






4.5.6 TEST RESULTS

| Frequency Range (MHz) | RF Field Position | R.F. Field Strength | Azimuth | Perform. Criteria | Results | Judgment |
|-----------------------|----------------------|-----------------------------|---------|----------------------|---------|----------|
| | | | 0 | | | |
| 20ML - 1000ML | Н / \/ | 3 V/m (rms) AM Modulated | 90 | | Δ. | PASS |
| 80MHz - 1000MHz | H/V | 1000Hz, 80% | 180 | Α | Α | PASS |
| | | | 270 | | | |

Note:

- 1) N/A denotes test is not applicable in this test report.
- 2) Criteria A: There was no change operated with initial operating during the test.
- 3) Criteria B: The EUT function loss during the test, but self-recoverable after the test.
- 4) Criteria C: The system shut down during the test.





4.6 EFT/BURST TESTING

4.6.1 TEST SPECIFICATION

| Basic Standard: | IEC/EN 61000-4-4 | | |
|------------------------|-----------------------------|--|--|
| Required Performance | В | | |
| Test Voltage: | Power Line: 1 kV | | |
| | Signal/Control Line: 0.5 KV | | |
| Polarity: | Positive & Negative | | |
| Impulse Frequency: | 5 kHz | | |
| Impulse Wave shape : | 5/50 ns | | |
| Burst Duration: | 15 ms | | |
| Burst Period: 300 ms | | | |
| Test Duration: | Not less than 2 min. | | |

4.6.2 MEASUREMENT INSTRUMENTS

| Item | Instr.Code | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|------------|---|--------------|----------|------------------|------------------|
| 1 | AN-E032 | Electrical Intelligent Transient Generator | | | G114921CA1341115 | 2021-05-23 |

Remark: "N/A" denotes No Model No. / Serial No. and No Calibration specified.

4.6.3 TEST PROCEDURE

The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m min. and 0.65mm thick min.

The other condition as following manner:

- a. The length of power cord between the coupling device and the EUT should not exceed 1 meter.
- b. Both positive and negative polarity discharges were applied.
- c. The duration time of each test sequential was 1 minute
- d. For the actual test configuration, please refer to the related Item –EUT Test Photos.


4.6.4 DEVIATION FROM TEST STANDARD

No deviation

DongGuan Anci Electronic Technology Co., Ltd.

1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.



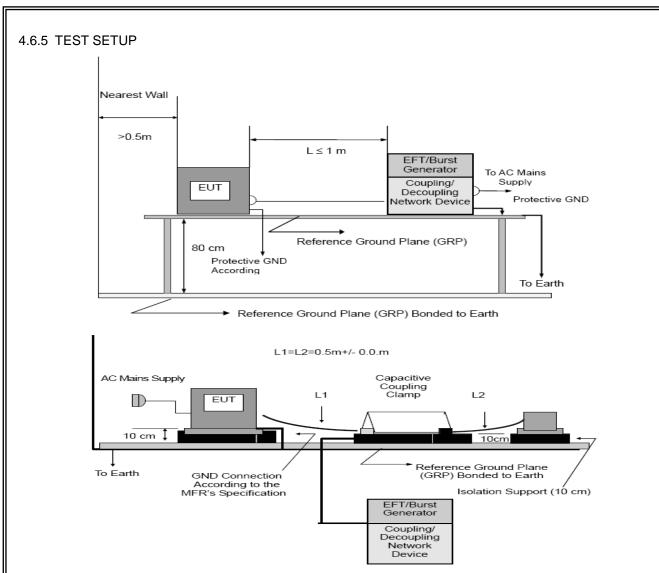

Note:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table (0.8m high) standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system. A minimum distance of 0.5m was provided between the EUT and the walls of the laboratory or any other metallic structure.

FLOOR-STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC/EN 61000-4-4 and its cables, were isolated from the Ground Reference Plane by an insulating support that is 0.1-meter thick. The GRP consisted of a sheet of aluminum (at least 0.25mm thick and 2.5m square) connected to the protective grounding system.

DongGuan Anci Electronic Technology Co., Ltd.

1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.




4.6.6 TEST RESULTS

| Mode | (X) AC Power Line | | () DC Pc | ower Line | () Signal/Control Line | | |
|----------------|-------------------|---------|-----------|-----------|-------------------------|---------|--|
| Test Level | 1KV | | 0.5 | SKV | 0.5KV | | |
| Port(s) | Polarity | Results | Polarity | Results | Polarity | Results | |
| | Р | В | Р | | Р | | |
| Line (L) | N | В | N | | N | | |
| | Р | В | Р | | Р | | |
| Neutral (N) | N | В | N | | N | | |
| 0 1(05) | Р | | Р | | Р | | |
| Ground (PE) | N | | N | | N | | |
| Signal/Control | Р | | Р | | Р | | |
| Line | N | | N | | N | | |
| Criteria | В | | В | | В | | |
| Result | В | | - | | | | |
| Judgment | PASS | | N/A | | N/A | | |

Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) N/A denotes test is not applicable in this test report
- 3) Criteria A: There was no change operated with initial operating during the test.
- 4) Criteria B: The EUT function loss during the test, but self-recoverable after the test.
- 5) Criteria C: The system shut down during the test.





4.7 SURGE TESTING

4.7.1 TEST SPECIFICATION

| Basic Standard: | IEC/EN 61000-4-5 | | | |
|---|---|--|--|--|
| Required Performance | В | | | |
| Wave-Shape: Combination Wave 1.2/50 us Open Circuit Voltage 8 /20 us Short Circuit Current | | | | |
| Test Voltage: | Power Line: ± 0.5 KV, ± 1 KV, ± 2 KV, ± 4 KV, | | | |
| Surge Input/Output: | L-N | | | |
| Generator Source: | 2 ohm between networks | | | |
| Impedance: | 12 ohm between network and ground | | | |
| Polarity: | Positive/Negative | | | |
| Phase Angle: 90/270 | | | | |
| Pulse Repetition Rate: 1 time / min. (maximum) | | | | |
| Number of Tests: | 5 positive at 90 and 5 negative at 270 | | | |

4.7.2 MEASUREMENT INSTRUMENTS

| ŀ | tem | Instr.Code | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|---|-----|------------|---------------------------|--------------|------------|------------|------------------|
| | 1 | AN-E001 | Lightning surge generator | Prima | SUG61005CX | PR13065597 | 2021-05-23 |

Remark: "N/A" denotes No Model No. / Serial No. and No Calibration specified.

4.7.3 TEST PROCEDURE

- a. For test applied to unshielded unsymmetrically operated interconnection lines of EUT:


 The surge is applied to the lines via the capacitive coupling. The coupling /decoupling networks shall not influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).
- b. For test applied to unshielded symmetrically operated interconnection /telecommunication lines of EUT: The surge is applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor cannot be specified. The interconnection line between the EUT and the coupling/decoupling networks shall be 2 meters in length (or shorter).
- c. For the actual test configuration, please refer to the related Item –EUT Test Photos.



4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

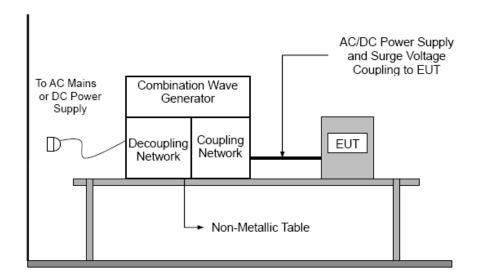

 $Dong Guan\ Anci\ Electronic\ Technology\ Co.,\ Ltd.$

1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.




4.7.6 TEST RESULTS

| Wave Form | | 1.2/50 | (8/20)Ti/1 | h us | | | | |
|------------------|-----------|------------|---------------|------|-----|-----|----------|----------|
| EUT Ports Tested | Polarity | | Phase Voltage | | | | Criteria | Judgment |
| EUT Ports Tested | 1 Oldrity | | 0.5kV | 1kV | 2kV | 4kV | | |
| | +/- | 0° | | | | | | PASS |
| L - N | + | 90° | В | | | | В | |
| L-IN | +/- | 180° | | | | | 5 | |
| | - | 270° | В | | | | | |
| | +/- | 0 ° | | | | | | |
| L - PE | + | 90° | | | | | N/A | N/A |
| L-PE | +/- | 180° | | | | | 1471 | 1471 |
| | - | 270° | | | | | | |
| | +/- | 0° | | | | | N/A | N/A |
| N DE | + | 90° | | | | | | |
| N - PE | +/- | 180° | | | | | 14/1 | |
| | - | 270° | | | | | | |
| | +/- | 0° | | | | | | |
| Signal Line | +/- | 90° | | | | | N/A | N/A |
| (N/A) | +/- | 180° | | | | | 14/1 | 1471 |
| | +/- | 270° | | | | | | |
| | +/- | 0° | | | | | | |
| Signal Line | +/- | 90° | | | | | N/A | N/A |
| (N/A) | +/- | 180° | | | | | | IN/A |
| | +/- | 270° | | | | | | |

Note:

- 1) P/N denotes the Positive/Negative polarity of the output voltage.
- 2) Polarity and Numbers of Impulses: 5 Pst / Ngt at each tested mode
- 3) N/A denotes test is not applicable in this Test Report
- 4) All voltages of the lower levels shall be satisfied





4.8 INJECTION CURRENT TESTING

4.8.1 TEST SPECIFICATION

| Basic Standard: | IEC/EN 61000-4-6 |
|----------------------|------------------------------------|
| Required Performance | A |
| Frequency Range: | 0.15 MHz - 80 MHz |
| Field Strength: | 3 Vr.m.s. |
| Modulation: | 1kHz Sine Wave, 80%, AM Modulation |
| Frequency Step: | 1 % of fundamental |
| Dwell Time: | at least 3 seconds |

4.8.2 MEASUREMENT INSTRUMENTS

| Item | Kind of Equipment Manufacture | | Type No. | Serial No. | Calibrated until |
|------|-------------------------------|-----------|-----------|------------|------------------|
| | CONDUCTED | | | | |
| 1 | IMMUNITY TEST | FRANKONIA | CIT-10 | 102D1253 | 2020-10-17 |
| | SYSTEM | | | | |
| 2 | CDN | FRANKONIA | CDN M2+M3 | A3011059 | 2020-10-17 |
| 3 | Electromagnetic clamp | FRANKONIA | KEMZ-801 | 21044 | 2020-10-17 |

Remark: "N/A" denotes No Model No. / Serial No. and No Calibration specified.

4.8.3 TEST PROCEDURE

The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m min. and 0.65mm thick min.

The other condition as following manner:

- a. The field strength level was 3V.
- b. The frequency range is swept from 150 KHz to 80 MHz, with the signal 80%amplitude modulated with a 1kHz sine wave. The rate of sweep did not exceed 1.5x 10-3 decade/s. Where the frequency range is swept incrementally, the step size was 1% of fundamental.
- c. The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- d. For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.8.4 DEVIATION FROM TEST STANDARD


No deviation

DongGuan Anci Electronic Technology Co., Ltd.

1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.





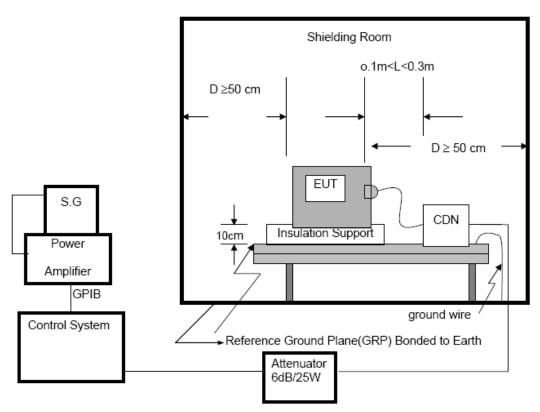

For the actual test configuration, please refer to the related Item –EUT Test Photos.

NOTE:

FLOOR-STANDING EQUIPMENT

The equipment to be tested is placed on an insulating support of 0.1 meters height above a ground reference plane. All relevant cables shall be provided with the appropriate coupling and decoupling devices at a distance between 0.1 meters and 0.3 meters from the projected geometry of the EUT on the ground reference plane.

DongGuan Anci Electronic Technology Co., Ltd.

1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.






Rev. 3.1

4.8.6 TEST RESULTS

| Test Ports (Mode) | Freq. Range MHz) | Field Strength | Perform. Criteria | Results | Judgment |
|-------------------------------|---------------------|-----------------------|----------------------|---------|----------|
| Input/ Output AC. Power Port | 0.1580 | | A | Α | PASS |
| Input/ Output DC. Power Port | 0.15 80 | 3V(rms) AM Modulated | Α | | N/A |
| Signal Line (N/A) | 0.15 80 | 1000Hz, 80% | А | | N/A |

| ı | V | O. | t | e |
|---|---|----|---|---|
| | | | | |

1) N/A - denotes test is not applicable in this Test Report.





4.9 VOLTAGE INTERRUPTION/DIPS TESTING

4.9.1 TEST SPECIFICATION

| Basic Standard: | IEC/EN 61000-4-11 |
|---|---------------------------------------|
| Required Performance: | C (For 30% Voltage Dips) |
| | B (For 100% Voltage Interruptions) |
| Test Duration Time: | Minimum three test events in sequence |
| Interval between Event: Minimum ten seconds | |
| Phase Angle: | 0°-360° |
| Test Cycle: | 3 times |

4.9.2 MEASUREMENT INSTRUMENTS

| Item | Instr.Code | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|------------|---|--------------|--------------|------------------|------------------|
| 1 | AN-E031 | Voltage Dips And Interruptions Generator | Everfine | EMS61000-11K | G113317CA8341117 | 2021-05-23 |

Remark: "N/A" denotes No Model No. / Serial No. and No Calibration specified.

4.9.3 TEST PROCEDURE

The EUT shall be tested for each selected combination of test levels and duration with a sequence of three dips/interruptions with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested. Abrupt changes in supply voltage shall occur at zero crossings of the voltage waveform.

4.9.4 DEVIATION FROM TEST STANDARD


No deviation

 $Dong Guan\ Anci\ Electronic\ Technology\ Co.,\ Ltd.$

1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.



4.9.5 TEST SETUP

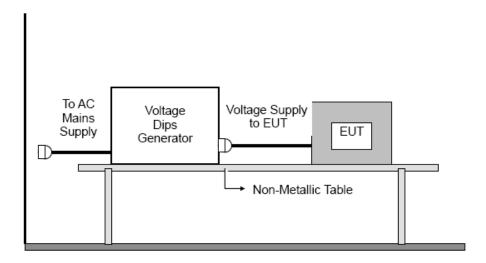

For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.9.6 TEST RESULTS

Test Power: 120Vac, 60Hz

| Voltage Reduction | Periods | Perform Criteria | Results | Judgment |
|----------------------|---------|---------------------|---------|----------|
| Voltage dip 30% | 10 | С | В | PASS |
| Interruption100% | 0.5 | В | В | PASS |

Test Power: 230Vac, 50Hz


| Voltage Reduction | Periods | Perform Criteria | Results | Judgment |
|----------------------|---------|---------------------|---------|----------|
| Voltage dip 30% | 10 | С | В | PASS |
| Interruption100% | 0.5 | В | В | PASS |

Note:

1). N/A - denotes test is not applicable in this test report.

 $Dong Guan\ Anci\ Electronic\ Technology\ Co.,\ Ltd.$

1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.





4.10 POWER-FREQUENCY MAGNETIC FILDS

4.10.1 MEASUREMENT INSTRUMENTS

| Item Kind of Equipment | | Manufacturer | Type No. | Serial No. | Calibrated until |
|------------------------|-----------------------|--------------|----------|------------|------------------|
| 1 | Magnetic Field Tester | EMC-PARTNER | MF1000-1 | 121 | 2020-10-17 |

Remark: "N/A" denotes No Model No. / Serial No. and No Calibration specified.

4.10.2 TEST LEVEL AND PERFORMANCE CRITERION

| Level | Magnetic Field Strength A/m | Performance criterion |
|-------|-----------------------------|-----------------------|
| 2 | 3 | Α |

4.10.3 TEST PROCEDURE

The EUT shall be subjected to the test magnetic field by using the induction coil of standard dimensions (1m*1m) and shown in Section 13.3 The induction coil shall then be rotated by 90 ein order to expose the EUT to the test field with different orientations.

4.10.4 DEVIATION FROM TEST STANDARD


No deviation

 $Dong Guan\ Anci\ Electronic\ Technology\ Co.,\ Ltd.$

1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.



Rev. 3.1

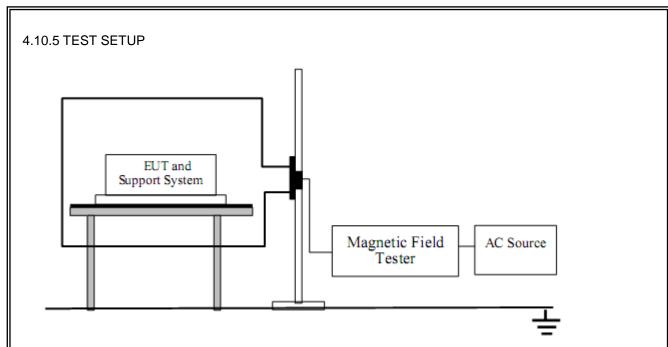

4.10.6 TEST RESULTS

| Operation Mode | Test Level | Testing Duration | Coil Orientation | Required | Observation | Result (Pass/Fail) |
|------------------|---------------|------------------|---------------------|----------|-------------|-----------------------|
| | 3A/m | 5 min / | x | A | Α | Pass |
| Normal operation | 3A/m | 5 min / | Y | Α | Α | Pass |
| | 3A/m | 5 min / | z | Α | Α | Pass |

Note:


Operation as intend, no loss of function during test and after test


DongGuan Anci Electronic Technology Co., Ltd. 1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.


Report No.: EA2006432E 02001 63 of 73



5. ATTACHMENT 5.1 EUT Test Photo



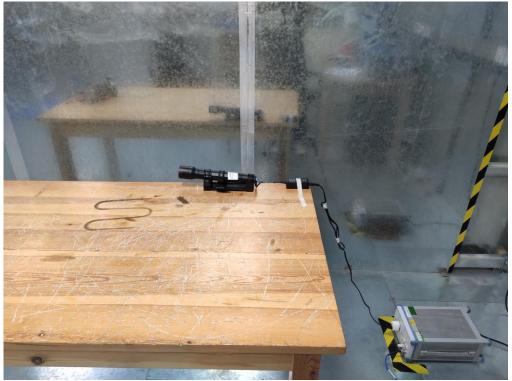

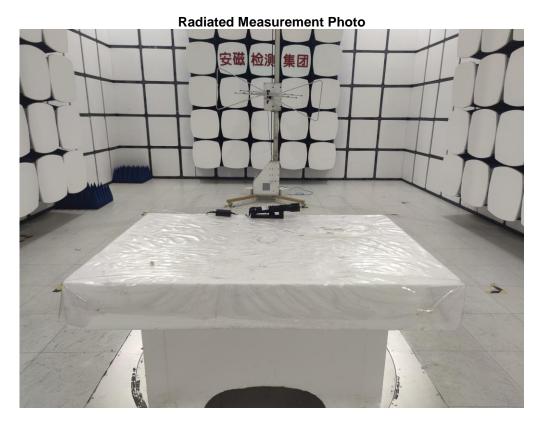


DongGuan Anci Electronic Technology Co., Ltd. 1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.

64 of 73 Report No.: EA2006432E 02001





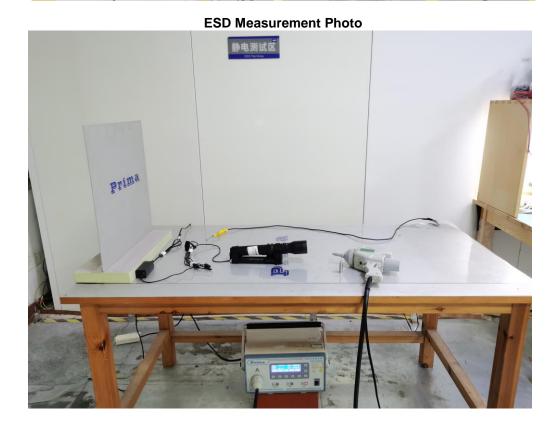

Report No.: EA2006432E 02001 65 of 73







EFT Measurement Photo




DongGuan Anci Electronic Technology Co., Ltd. 1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.





Rev. 3.1

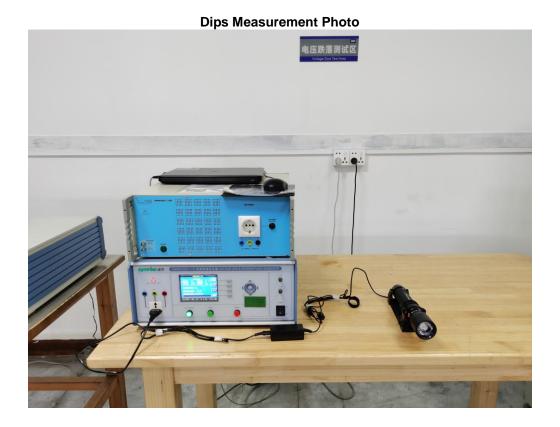

DongGuan Anci Electronic Technology Co., Ltd. 1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.

5.2 EUT Photo



Figure 1. Overall view of unit



Figure 2. Overall view of unit





Figure 3. Overall view of ADAPTER



Figure 4. Overall view of unit





Figure 5. Overall view of unit



Figure 6. Overall view of unit





Figure 7. Internal view of unit

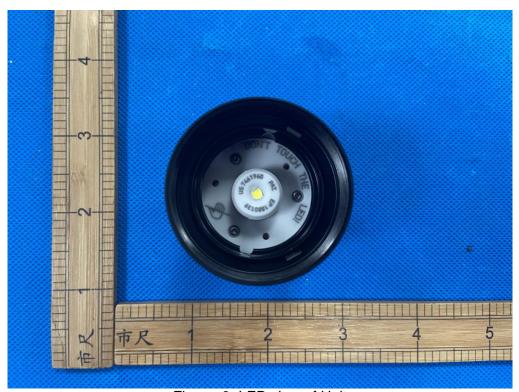


Figure 8. LED view of Unit



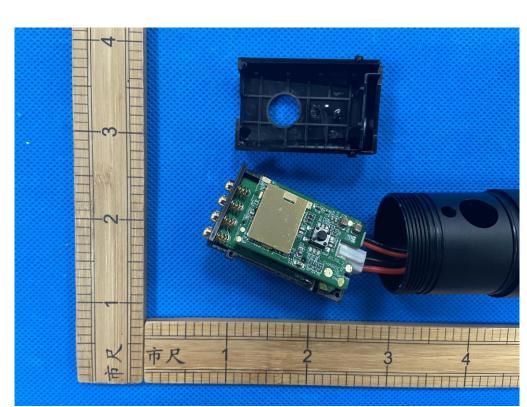


Figure 9. Internal view of unit

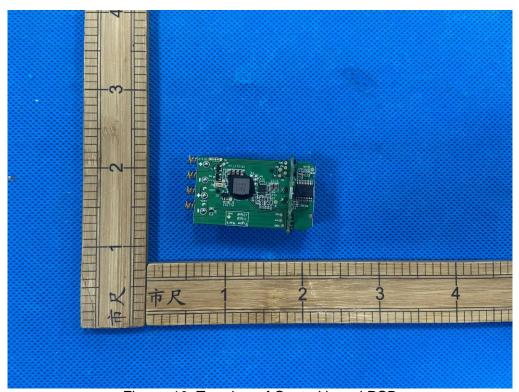


Figure 10. Top view of Control board PCB



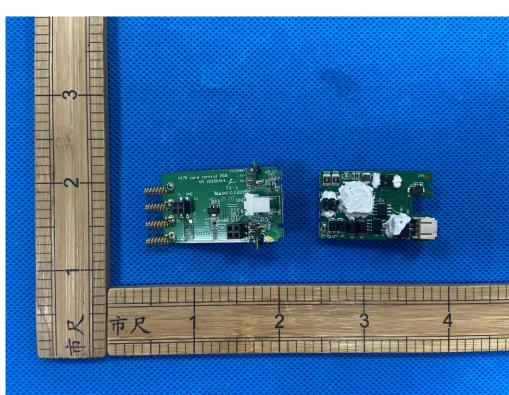


Figure 11. Top view of Control board PCB

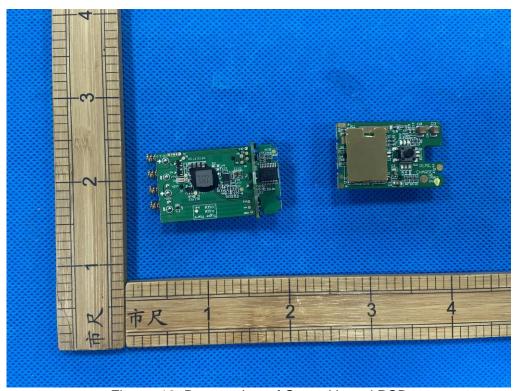


Figure 12. Bottom view of Control board PCB








Figure 13. Battery view of unit

DongGuan Anci Electronic Technology Co., Ltd. 1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.