

 **MEYRA®**



inspire joy of life

1.610
iCHAIR MC1 LIGHT




TRIED AND TESTED ENTRY-LEVEL MODEL

iCHAIR MC1 LIGHT- THE INTELLIGENT ENTRY-LEVEL MODEL

- Electrical back angle adjustment from -10° to 50°
- Electrical tilt from -4° to 24°
- For relaxed positioning and effective pressure relief
- Use of VR2 electronics
- Available in three different seat widths
- Pull-out battery case enables simple and effective maintenance
- Split aluminium rims for quick and easy service
- High-grade impact-protected and powerful LED lighting for enhanced safety

iCHAIR
MC1 LIGHT
1.610



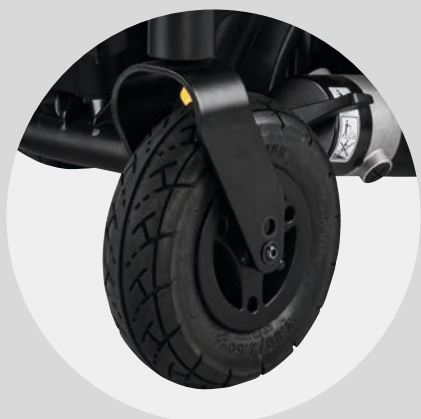

PRODUCT COMPARISON



iCHAIR MC BASIC

iCHAIR MC1

iCHAIR MC1 LIGHT

Speed in km/h	6	6	6 / 10
Seat widths in mm	430	430, 480	380, 430, 480
Electrical adjustment	-	Back / Tilt	Back / Tilt

Compare the advantages of the new iCHAIR MC1 LIGHT with its predecessors. **The iCHAIR MC BASIC and the iCHAIR MC1 will in future be replaced by the iCHAIR MC1 LIGHT.**

SPECIFICATIONS



iCHAIR MC1 LIGHT

Seat width in mm	380 – 600
Width in mm	630 – 750 ¹⁾
Seat depth in mm	400 – 530
Lower leg length in mm	280 – 430
Seat height front (without seat cushion) in mm	440 / 480 / 510
Total height in mm	930 – 1,130 ²⁾
Back height in mm	480
Armrest height in mm	240 – 350
Length with / without footrest in mm	1,080 / 840
Transport length in mm	840
Transport width min. in mm	630
Transport height min. in mm	560 – 660
Wheel size, front, in mm	230 x 70 (9")
Wheel size, rear, in mm	356 x 75 (14")
Max. obstacle height in mm	60
Turning radius in mm	840
Ground clearance (battery tray) in mm	80
User weight in kg	130
Empty weight in kg	94 ³⁾
Permissible total weight in kg	224
Max. additional load in kg	10
Speed in km/h	6 / 10
Motor power in W	2 x 180 / 2 x 300
Range max. in km	30 ⁴⁾
Permitted uphill / downhill gradient	8,5° / 15%
Seat tilt, electrical, in degrees	-4° to 24° ⁵⁾
Back angle, electrical, in degrees	-10° to 50°
Seat tilt, mechanical, in degrees	0° / 4° / 10°
Back angle, mechanical, in degrees	-10° to 30°
Steering type	Indirect

Dimensional tolerances ± 10 mm, ± 2°, data subject to design changes

¹⁾ ready to move

²⁾ seating systems belt / ErgoSeat

³⁾ without armrests and legrests

⁴⁾ with 43 Ah (5h), 50 Ah (20h) battery

⁵⁾ adjustment range dep. on SH and castor wheel size max. +/- 3° deviation



Feel free to contact us:

MEYRA GmbH

Meyra-Ring 2
D-32689 Kalletal-Kalldorf

✉ info@meyra.de

Tel.: +49 5733 922 - 0
Fax: +49 5733 922 - 9311

www.meyra.de